


# 150kVA Soundproof Generator



## Features

- Noise Level @ 1m, 74dBA (@7m, 62dBA)
- Autostart DSE CP with MCCB
- VELCB
- Micro Switch Protection over Buss Bar Door
- Oil Extraction Pump
- 3 Way Fuel Valve
- Battery Isolator
- Water Separator Std
- Cental Lifting Hook
- Fork Lift Pockets
- Fully Bunded

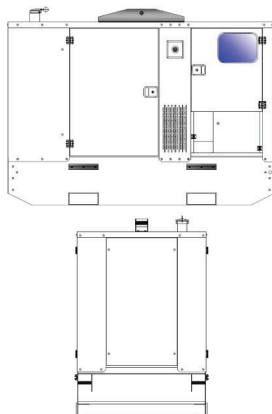

## Options

- Bulk Fuel Tank
- Battery Charger
- Deep Sea 7510 Loadshare


Generating Set	50 Hz	60 Hz
Continuous Power	150 kVA	190 kVA
Standby Power	165 kVA	209 kVA
Noise Level @ 1m / 7m	75 dBA / 63 dBA	
Power Factor	cos $\phi$ 0.8	
Continuous Power	120 kW <sub>e</sub>	158 kW <sub>e</sub>
Standby Power	132 kW <sub>e</sub>	174 kW <sub>e</sub>
Amps 3 Phase	208 A	
Fuel consumption 70% load	22.4 l/h	28.4 l/h

Engine	1500 rpm
Model	John Deere 6068HFU79
Continuous Power	130 kW <sub>m</sub>
Standby Power	143.8 kW <sub>m</sub>
Aspiration	Turbocharged
Cooling System	Water
Speed Governor	Electronic
Cylinder Number	6
Displacement	6,800 cm <sup>3</sup>

Logistic Information	GX170JDE
Fuel Tank	400 ltr
Weight (Wet)	2,860 kg
Dimensions (L x W x H)	335 x 110 x 217 cm

Control Panel	Deep Sea 7310
Auto Start	Standard

Deep Sea 7310 Control Panel

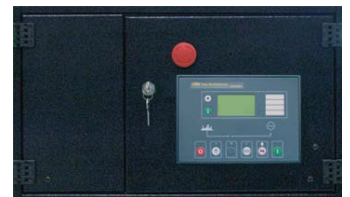

ABIRD has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.