

Once test pressure has been attained, open the service valve, wait until both pump and test pressure gauges give identical readings then close the service valve and switch the pump OFF.

Any pressure loss can now be read off the test pressure gauge.

## EQUIPMENT CARE

**Never push the equipment beyond its design limits.** If it will not do what you want with reasonable ease, assume you have the wrong type of pump for the job. Ask at your local HSS Hire Shop for advice.

**Keep the equipment clean.** You will find this less of a chore if you clean up regularly rather than wait until the end of the hire.

**Handle hoses with care.** Never lay them over sharp edges, where they could be walked on, or anywhere else that exposes them to the risk of damage.

**When not in use, store the equipment somewhere clean, dry and safe** from thieves. **Protect this equipment from frost and freezing temperatures.**

**Never pump anything other than clean water, never use it to pump dangerous or corrosive liquids.**

Be sure **never** to **leave the pump running once test pressure has been attained.** Switch it OFF.

**Never run the pump dry,** you will damage it.

**Always de-pressurise the system following the recommended method.** Releasing the pressure in any other way could cause the pump to lock up.

## FINISHING OFF

To **release the pressure in the system.** Turn the **water supply OFF** then **disconnect the hose** to the water supply and **direct it into a bucket or drain.**

That done, **open the service valve** and wait until **water stops flowing out.**

**Finally, disconnect the pressure hose** and coil all hoses neatly in the pump box ready for return to your local HSS Hire Shop.

## ...any comments?


If you have any suggestions which would improve the information within this guide please fax your comments or write to the Product Manager at the address below  
**Fax: 0181-687 5001**



©HSS Hire Service Group Plc 1998 No. 749/01  
Group Office: 25 Willow Lane, Mitcham, Surrey CR4 4TS  
Web Site: <http://www.hss.co.uk>

## Operating & Safety Guide 749

# HSS Hire Shops

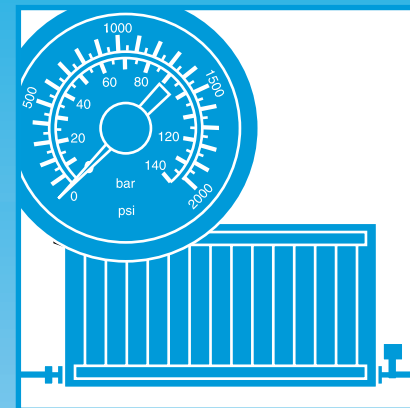

# Electric Pressure Test Pump

This offers an ideal alternative to the hand operated model when testing larger or more highly pressurised systems quickly and efficiently.




Code 68832

## GENERAL SAFETY


For advice on the safety and suitability of this equipment contact your local HSS Hire Shop.

This equipment has been designed to be used by an able bodied adult. If you suffer from either a temporary or permanent disability, you must seek expert advice before using this equipment.

Keep children, animals and bystanders away from the work area.

 **Never use this equipment if you are ill, feeling tired, or under the influence of alcohol or drugs.**

This equipment should only be used by a competent person who has read and understood these instructions.

 **Wear practical, protective clothing, gloves and footwear.** Avoid loose garments and jewellery that could get in the way of the work, tie back long hair.

**Never carry, lift or pull the equipment by its power supply cable or hose, always use the handles on the box.**

**Check the equipment before use.** If it shows signs of damage or excessive wear, return it.

## ELECTRICAL SAFETY

The HSS Pressure Test Pump requires a 110v generated supply, or may be powered from the mains via a suitable 110v transformer.


**Keep the Pumps power supply cable out of harm's way.** Never run it over sharp edges, or where it could cause someone to trip.

**Extension leads must be fully unwound and loosely coiled, away from the equipment. Never run them through water,** over sharp edges or where they could trip someone.

**If the Pump fails, or if its power supply cable or plug is damaged, return it. Under NO circumstances must you use the pump or attempt to repair the damage yourself.**

The pump is designed to be used with water, and is perfectly safe to do so provided the user ensures that its box and supply plug are kept dry at all times.

Using ordinary electrical equipment in very damp or wet conditions can be dangerous.

 **To reduce the risk of electric shock, use a heavy duty RCD** (Residual Current-Operated Device) available from your local HSS Hire Shop.

**Ensure the pump is switched OFF before plugging into the power supply.**

## GETTING STARTED

Ensure any electrical equipment in the vicinity of likely leaks is switched OFF before conducting the pressure test.

### User / Operator Warning

This machine is designed to test the water system on heating installations for leaks, using a pressure system. The installation must only be tested when fully charged with water, therefore all air in the system must be removed. Only qualified persons should use this equipment, as these instructions only cover setting up and using the pump. It is the hirers responsibility to ensure the pressure used is correct for the installation.

**There are two models available from HSS Hire Shops. Both models work in exactly the same way except for the ON/OFF switch.** Dependent on model, switch the pump ON by either pushing the ON/OFF switch on the side of the motor, or turning the ON/OFF switch on top of the motor housing to 'I'. To switch the pump OFF simply reverse the direction. Familiarise yourself with the switches and their location so that you can operate them quickly in an emergency.

### Hose Sense

Ensure hoses are free from kinks and sharp turns that could impede the flow of the liquid through the system. The pump must never be allowed to run without a water supply.

Open the carry box and **unpack the power supply cable, and both inlet and pressure hoses.**

**Connect the pump's inlet hose to the water supply then connect its pressure hose to the system** you wish to test.


All that remains is to **plug the unit into its power supply and switch the supply ON.**

## BASIC TECHNIQUES

**Open a tap in the system to be tested in order to allow air to escape and switch the pump ON.**

**Fill the system with water** and remove any trapped air, **close the systems tap and turn the pump OFF.**

**Close the service valve, and switch the pump ON.**

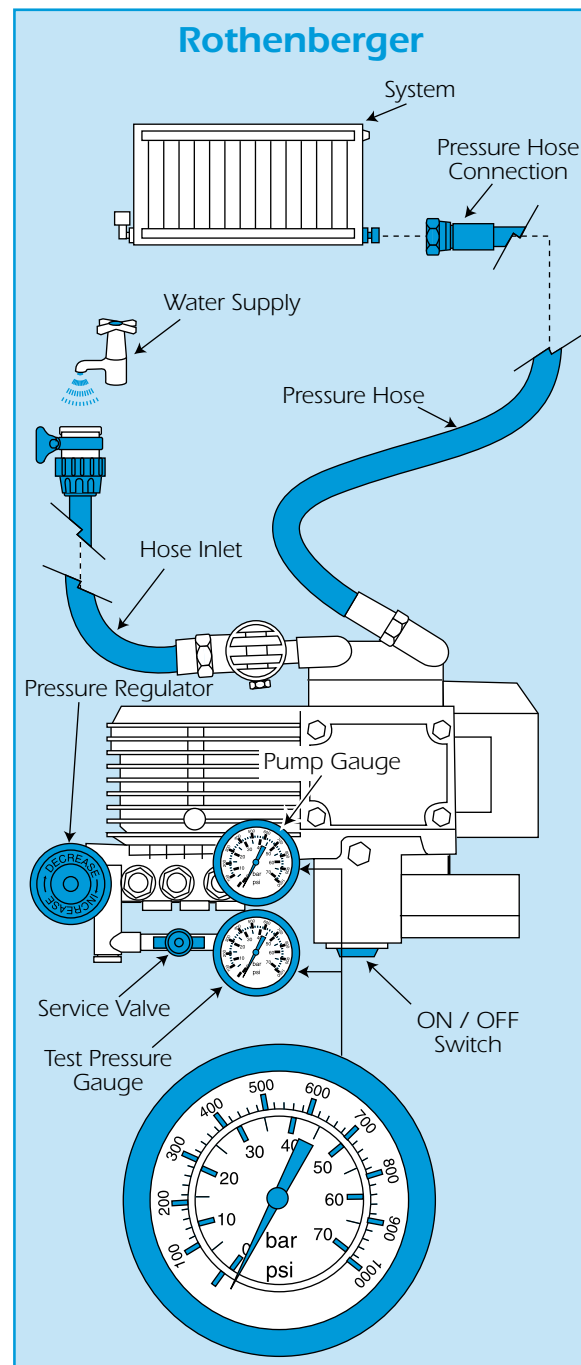

You can now **Adjust the pressure regulator until the PUMP GAUGE reads the required test pressure.** Turn this clockwise to increase the pressure, anti clockwise to decrease it.