

Core Business

HSS Hire provide an extensive range of tools and equipment available through all our branches for either **pick up or delivery.**

This catalogue highlights some of our equipment, but **with thousands of products available,** it only scratches the surface. Please speak to your Area Sales Manager or local branch if you are looking for a particular product.

We also have a **full range of accessories available** including transformers, extension leads, blades and safety equipment.

Cross Hire

We will help you to source whatever kit you need, wherever you need it and our dedicated Hire Controllers will manage the whole process for you.

- · Specialist Equipment Sourcing
- · Emergency Kit Replacement
- · Dedicated HSS Support
- \cdot Use your HSS Account to order





| Training | 4 |
|------------------------------|----|
| Access | 4 |
| Powered Access | 6 |
| Lift & Shift | 12 |
| Building, Events & Siteworks | 15 |
| Plant | 20 |
| Accommodation | 21 |
| Concreting & Compaction | 22 |
| Lighting | 43 |
| Safety | 24 |
| Breaking & Drilling | 26 |
| Sawing & Cutting | 30 |
| Sanding & Fixing | 24 |
| Painting & Decorating | 28 |
| Surveying & Location | 32 |
| Cooling | 36 |
| Heating | 38 |
| Power | 45 |
| Drying & Pumping | 40 |
| Plumbing | 39 |
| Cleaning | 48 |
| Gardening | 8 |
| Sales | 47 |

Training

HSS Training is the specialist training division of HSS Hire Ireland. We offer **industry recognised courses** in a wide range of workplace safety, working at height, health & safety and industry specifc scenarios.

We have experienced trainers who understand that training your workforce is key to ensure that they're productive and – more importantly – kept **safe from harm**. Let us help make sure your workforce is better equipped to be safe on site.



Ideal for those who do not want time away

IPAF MEWP Operator Training - For anyone required to supervise or rescue an operator, or who needs to safely operate a MEWP in any machine category.

1a - Static Vertical - Scissor lift with outrigger

1b - Static Boom - Van Mount Truck

3a - Mobile Vertical - Scissors Genie 1932

3b - Mobile Boom - Star 10 / Genie Z45 / S6

Working at Height - Covers the essential points (current legislation, regulations and guidance) for those working at height.

Push Around Vertical (PAV) - This IPAF Operator course with practical training session nd assessment covers small static vertical machines with no mechanical drive that are physically pushed around.

Harness Use & Inspection - For those who use or wear a harness themselves & those who are responsible for inspecting their company's personal fall protection equipment and maintaining inspection records.

MEWPS for Managers (ONLINE) - Aimed at those who plan, supervise or manage work at height with Mobile Elevating Work Platforms (MEWPs).

MEWP Demonstrator - For anyone who may be delivering a MEWP and is obliged to show the hirer how to use the machine, or an operative that needs to do a pre-start check on a machine or a handover with a colleague.

Mental Health & Wellbeing Training - Teaches you to recognise various mental health problems, how to start a conversation with someone who is suffering, and what to do until further help is available.

Manual Handling Training - Provides the skills and knowledge required to be proficient in Manual Handling operations inlcuding any lifting, pulling, pushing or moving of heavy items.

Fire Marshal Training - Provides delegates with the necessary knowledge and understanding required to competently undertake the role of fire warden / fire marshal in the event of an emergency.

Access

MiTower - One Person Quick Build Tower

The MiTower one-person quick build tower comes self contained in its own transport and storage pack making it easily fit through a standard doorway and into a small van. This high-quality EN1004 class 3 product is tested and approved by TUV Nord.

- · Working height of 6m, platform height of 4m
- · One person assembly and dismantle
- · 10 minutes for assembly

Note: Do not use if wind speed exceeds 17mph

| 100% |
|-------|
| 10070 |
| |
| |
| |







| Technical Specification | | |
|----------------------------|---------------|---------------|
| Code | M6286 | M6287 |
| Platform Height | 4m | 4m |
| Working Height | up to 6 m | up to 6 m |
| S.W.L. | 150kg | 275kg |
| Tower Dimensions (LxW) | 1.17m x 0.73m | 1.62 x 0.728m |
| Platform Dimensions (LxW) | 1.02 x 0.61m | 1.62 x 0.73 m |
| Stabiliser Footprint (LxW) | 2.8 x 2.4m | 3.90 x 3.10 m |
| Weight | 110kg | 126 kg |

Adjustable Safety Platform Steps

Providing full guard rail protection, these adjustable platform steps allow you to reach heights over 4m. All models can be folded for transport.

| M6349 | M6350 |
|---------|---------------------------|
| 6 Tread | 9 Tread |
| 150kg | 150kg |
| 1.52m | 2.23m |
| 30kg | 36kg |
| | 6 Tread 150kg 1.52m |









Alloy Access Tower

Full Width Towers

A range of 1.45m wide alloy towers supplied with castor wheels for easy, on-site mobility. A safe method for tasks such as inspection, general maintenance and light construction.

Narrow Width Towers

Where space is limited, our range of 0.85 m wide mobile alloy towers can solve your access problem – perfect for stairwells, alleys and narrow forecourts.

- · Choice of 1.8 m or 2.5 m long decks
- · Safety toe-boards and stabilisers included
- · Adjustable locking castors for safety & mobility

HSS towers conform to either 3T or advanced guardrail method of assembly. The product codes below relate only to tower following the 3T method of assembly.

- Do not use access tower if the wind speed exceeds 17 mph.
- · Tower heights are shown including handrail.
- Tower width measurements are taken from centre to centre of upright frames.

| Technical Specifications | | |
|--------------------------|------------------|-------------------|
| Full Width 1.45M | | |
| Max. S.W.L | 225kg Per Deck | 950kg Per Tower |
| Platform (LxW) | 1.8 x 1.45 m | 2.5 x 1.45 m |
| | | |
| Narrow Width 0.85 | М | |
| May CM/I | 27Flor Dor Dools | OFO La Day Talvar |

| Max. S.W.L | 275kg Per Deck | 950 kg Per Tower |
|------------------|----------------|------------------|
| Platform (L x W) | 1.8 x 0.85m | 2.5 x 0.85m |

| Handrail | Narrow / Short | Narrow / Long | Wide / Short | Wide / Long |
|----------|----------------|---------------|--------------|-------------|
| Height | 0.85. x 1.8 | 0.85 x 2.5 | 1.45 x 1.8 | 1.45 x 2.5 |
| 3.2m | M6105 | M6119 | M6129 | M6143 |
| 4.2m | M6107 | M6120 | M6130 | M6144 |
| 5.2m | M6108 | M6121 | M6132 | M6147 |
| 6.2m | M6109 | M6122 | M6133 | M6149 |
| 7.2m | M6111 | M6123 | M6134 | M6150 |
| 8.2m | M6113 | M6124 | M6135 | M6151 |
| 9.2m | M6114 | M6125 | M6136 | M6152 |
| 10.2m | M6115 | M6126 | M6138 | M6153 |
| 11.2m | M6116 | M6127 | M6139 | M6155 |











Delta Deck Low Level Platform

An innovative work at height solution, this compact Delta Deck Low Level Platform is easy to transport and store and is perfect for those needing flexibility when working at heights of 3m and below. Full and correct height guardrails are automatically erected at all platform height setting.

- · Quick Assembly
- · Compact Footprint
- · Multiple Working Heights

| Technical Specification | |
|--------------------------|---------------------|
| Code | M6290 |
| Platform Height | 0.45-0.87m |
| Working Height | 2.45-2.87m |
| S.W.L. | 200kg |
| Tower Dimensions (LxWxH) | 1.12 x 0.76 x 1.90m |
| Folded Dimensions | 0.31 x 0.76 x 1.12m |
| Weight | 26.89kg |









Treble Ladder

This Treble Ladder is robust and built to last. Made from lightweight aluminium with highperformance box-section alloy stiles, unique wrap-around top clips and slip-resistant rungs. They are suitable for trade use.

- · High-performance box-section alloy stiles for strength and rigidity
- · Easy to use push-up operation
- · Rung clips secure sections together for safe and easy use and transport

| Technical Specification | | |
|-------------------------|-------|-------|
| Code | M6267 | M6268 |
| Closed | 2.5m | 3.5m |
| Extended | 6m | 9.1m |
| Weight | 18kg | 22kg |











GRP STEP with handrail

This GRP Step with Handrail uses strong, non-conductive fibreglass rails and includes twin handrails for safety. It is ideal for working at heights of up to 3.45m.

- Non-conductive fibreglass stiles ideal for working around electricity
- Fitted with a safety chain for extra security when working on a platform
- · Conforms to the latest EN131 Standard
- · Slip resistant tread





| Technical Specification | | | |
|-------------------------|--------------------------|--------------------------|--------------------------|
| Code | M6262 | M4611 | M6264 |
| Number of Steps | 4 Tread | 6 Tread | 8 Tread |
| Closed Height | 1.91m | 2.38m | 2.85m |
| Length x Width | 1.91m x 0.62m | 0.52mx 0.71m | |
| Material | Fibreglass; Plastic foot | Fibreglass; Plastic foot | Fibreglass; Plastic foot |
| Maximum Height | 0.85m | 1.27m | 1.7m |
| Open Height | 1.7m | 2.13m | 2.55m |
| Safe Working Load | 150kg | 150kg | 150kg |
| Weight | 14kg | 17kg | 20kg |
| Working Height | 2.6m | 3.02m | 3.45m |

Reducing the cost of hire

Due to our size and national network we have the buying power to provide competitive hire prices. Our dedicated sales teams will work with you to scope out your requirements and provide a bespoke and cost effective solution for you.

Powered Access

WE ARE POWERED ACCESS EXPERTS

Dingli Mast Lifts / Skyjack SJ16

The Dingli AMWP7-8100L is an Electric Low Level lift fitted with electric lifting push rods to replace the traditional hydraulic cylinder. Low noise and low emissions. The Skyjack SJ16 is a compact self propelled vertical mast lift with brilliant manoeuvrability.

- · Ideal work platform if you are operating in tight work spaces, with a zero inside turning radius
- · Easy to operate and driveable at full height.

| Technical Specification | | |
|---------------------------|---------------|-----------------|
| Code | M5000 | M4999 |
| Platform Height | 4.7m | 4.75 m |
| Working Height | 6.7m | 6.75 m |
| S.W.L. | 200kg | 227kg |
| Platform Dimensions (LxW) | 1.00m x 0.76m | 1.37 m x 0.77 m |
| Weight | 990kg | 971 kg |













Pop-Up Pro iQ10

For those essential indoor repair, maintenance and installation tasks where you need safe and simple low level access, this Pop Up Platform is versatile and easy to use. Battery powered operation

- · Lightweight and compact
- Low noise level and CO2 emission free with no exhaust fumes

| Technical Specification | |
|---------------------------|------------------|
| Code | M6281 |
| Item | Pop up |
| Power | 12V battery |
| Working Height | 5.0m |
| S.W.L | 240kg |
| Platform Height | 3.0m |
| Raise / Lower Time | 18/20 sec |
| Dimensions (L x W x H) | 1.2 x 0.7 x 1.8m |
| Weight | 394kg |











Eco Manual Platform Lift

The Eco has an auto-lock mechanism that activates on elevation ensuring the product cannot be moved when in use. Auto lock system allows you to work at any height during elevation. Easy to manoeuvre and fits through a standard doorway or lift. This is for indoor use only, with no oil and hydraulics it is ideal for all clean room activities.

- · Eco-friendly
- · Manual lift in design with no power consumption, low noise or CO2 emissions
- · Anti-surf auto brake when elevated
- · Step into the platform, no climbing
- · Intuitive to operate, turn handle to elevate
- · Ideal for clean room projects

| Technical Specification | | |
|-------------------------|--------------------------|--|
| Code | M5920 | |
| Platform Height | 2.2m | |
| Working Height | 4.2m | |
| S.W.L | 150kg (1 person + tools) | |
| Dimensions | 1.28 x 0.70 x 1.94 | |
| Weight | 305kg | |











Star 6AC Vertical Masts

The Star 6AC is more agile, more robust, and more reliable than ever. With the ability to reach a maximum market-leading height in only 14 seconds the Star 6AC is the ideal solution for any site. Low noise level and C02 emission free with no exhaust fumes, fitted with AC motors for lower power consumption.

- · Suitable for Indoor or Outdoor Use
- · High precision driving and smoothness

| Technical Specification | | |
|-------------------------|------------------|--|
| Code | M5916 | |
| Platform Height | 3.8m | |
| Working Height | 5.8m | |
| Power | 12V -105 Ah (C5) | |
| Weight | 835kg | |











Star 10 Mast Boom Lift

This tight turning Mast Boom Lift (Star 10s) with ASB bar has an articulating jib and a 10m working height with Activ' Shield Bar. It is the solution for carrying out cleaning, maintenance and repair work in retail stores and factories.

- · Activ Shield Bar fitted as standard
- · Platform Height 8m
- · Working Height 10m
- · Active pot hole protection for added safety
- · Narrow turning radius provides unparalleled positioning



| Technical Specification | |
|-------------------------|--------------------|
| Code | M5924 |
| Platform Height | 8.0m |
| Working Height | 10.0m |
| S.W.L. | 200kg |
| Dimensions LxWxH) | 2.8 x 0.99 x 1.98m |
| Weight | 2760kg |









HR12 Mast Boom Lift

With its compact dimensions and class-leading working envelope, the HR12 has always been versatile and reliable. Its telescopic boom provides increased accuracy when positioning the platform. Bi-Energy allows you to work in a wide range of environments.

| Technical Specification | |
|-------------------------|---------------------|
| Code | M5925 |
| Platform Height | 10.2m |
| Working Height | 12.2m |
| Outreach | 6.1m |
| S.W.L. | 215kg |
| Power | 24V |
| Dimensions (LxWxH) | 4.10 x 1.50 x 1.90m |
| Weight | 3470kg |
| Self Propelled | Ves |











Scissors Lift - 78m

This electric scissor lift allows you to work at heights of up to 7.8m. The scissor lift can be used for fixing light fittings, electrical and heating installations, painting and decorating or industrial cleaning. You'll be able to use the scissor lift in places like warehouses, theatres, factories and even to assist you with home renovations. The scissor lift is perfect for jobs that are in tight spaces and the unit can easily fit through standard single or double doors. You'll be able to manoeuvre the equipment with the easy to use functions and will be kept safe by the access gate and rails.



Note: Do not use outdoor machines if wind speed exceeds 28 mph

| Technical Specification | |
|-------------------------|--------------------|
| Code | M5928 |
| Platform Height | 5.8m |
| Working Height | 7.8m |
| Extending Deck | 1m |
| S.W.L. | 227kg |
| Dimensions (LxWxH) | 1.82 x 0.81 x 2.11 |
| Weight | 1503kg |









Compact Electric Scissor Lift - 10m

Suitable for work indoors and outdoors on firm, level surfaces where space is limited. Its stateof-the-art Genie AC electric E-Drive system offers unmatched efficiency and runtime on installation, maintenance and construction jobs where a significant amount of driving is required.

- · Quiet, zero-emission electric operation
- · Front-wheel drive and zero inside turning radius for easy positioning

| Technical Specification | |
|-------------------------|---------------|
| Code | M5930 |
| Working Height | 9.96 m |
| S.W.L. | 454 kg |
| Dimensions (LxW) | 2.44m x 1.16m |
| Weight | 1,971kg |











Narrow Electric Scissor Lift - 10m

This guiet, electrically-powered Genie 2632 scissor lifts is excellent for indoor construction, maintenance and installation applications on firm, level surfaces.

- · Easy to manoeuvre in tight spaces
- · Large platform workspace

| Technical Specification | |
|-------------------------|---------------|
| Code | M5927 |
| Working Height | 10m |
| S.W.L. | 227kg |
| Dimensions (LxW) | 2.43m x 0.81m |
| Weight | 2145g |











Electric Scissor Lift - 11m

This quiet, electrically-powered scissor lift is excellent for indoor construction, maintenance and installation applications on firm, level surfaces.

- · Easy to manoeuvre in tight spaces
- · Large platform workspace

| Technical Specification | ı | |
|-------------------------|---------------|--|
| Code | M6362 | |
| Working Height | 10m | |
| S.W.L. | 227kg | |
| Dimensions (LxW) | 2.43m x 0.81m | |
| Weight | 2145g | |











WE ALSO OFFER IPAF TRAINING COURSES THROUGH HSS TRAINING

Electric Scissor Lift - 12M

COMPACT 12 electric scissor lift can reach 11.75m working height and features non-marking tyres and has the capacity to lift two operators. This electric scissor lift is ideal for a wide range of indoor and outdoor environments including warehouses, cleaning and facilities management. To help improve safety and productivity this product is available with material handling attachments to maximize platform space.

- · Small and mobile
- · Environmentally-friendly electric motor

| Technical Specification | | |
|-------------------------|------------|--|
| Code | M5931 | |
| Working Height | 11.7m | |
| SWL | 300kg | |
| Dimensions (LxW) | 2.5 x 1.2m | |
| Weight | 2470g | |











Genie Runabout GR-20

The Genie Runabout GR-20 lift is a compact. low-weight machine that will make your life easier on site. It has a zero inside turning radius, is driveable when fully elevated and fits through doorways and in most passenger elevators. Ideal for warehousing, transporting, inventory management and general maintenance.

- · 30% gradeability
- · Proportional lift and drive controls

| Technical Specification | |
|-------------------------|----------|
| Code | M6321 |
| Working Height | 8.02 m |
| S.W.L. | 159 kg |
| Stowed Height | 1.98 m |
| Machine Width | 80 cm |
| Weight | 1,140 kg |
| | |











Skyjack 19ft Electric Scissor Lift


This Skyjack 19ft Electric Scissor Lift has zero emissions with 16% operational carbon saving compared to previous model. It has solid rubber non marking tyres, pothole protection system and variable speed, dual front wheel electric drive.

- · Drivable at full height
- · 90° Steering (zero inside turning radius)
- · Dual holding brakes
- · 0.91 m Roll out extension deck
- · 25% Gradeability

Skyjack Xstep also available to add on. This maximizes reach and productivity. It gives operators safe and increased access into and around tight, restricted spaces, such as ceiling openings and ceiling mounted structures.

- Full height platform rails provide operator security
- One person installation process and no special tools or lifting equipment required
- · Installed or removed in 5 minutes

| M8005 | | |
|--------------|---------------------------------------|---------|
| | | |
| | S S S S S S S S S S S S S S S S S S S | |
| | | |
| Soviace is | 1215 E | STOTACE |
| I wyfex 0 De | | |
| | 0 | |



| Technical Specification | | |
|-------------------------|---------------|--|
| Code | M8005 | |
| Working Height | 7.65 m | |
| S.W.L. | 227kg | |
| Dimensions (LxW) | 1.80m x 0.82m | |
| Weight | 1.468 kg | |

| Technical Specification | |
|-------------------------|---------------|
| Code | M8006 |
| Step Height | 19 in |
| Rail Height | Rail Height |
| Dimensions (LxW) | 20 in x 23 in |
| Weight | 77 lbs |
| S.W.L | 250 lbs |
| Stowed Height | 38in |
| Platform Area | 399 in2 |









Available Powered Access

We have a huge range of Powered Access equipment. For more details, please contact your local branch or Area Sales Manager.

- · Diesel Articulated & Straight Booms from 45ft to 135ft
- · Diesel Scissor Lifts from 10m to 30m
- · Large Electric Scissors from 10m to 22m
- · Electric Boom Lifts from 10m to 22m

Telescopic Booms

| | 45ft | 65ft | 85ft | 140ft |
|-----------------------|-----------------------------|-----------------------------|------------------------------|------------------------------|
| Platform Height | 13.72m | 19.80m | 25.90m | 41.15m |
| Working Height | 15.72m | 21.80m | 27.90m | 42.67m |
| SWL | 227kg | 227kg | 227 kg | 227 kg |
| Dimensions (LxWxH) | 8.48m x 2.30m x 2.49m | 9.42m x 2.49m x 2.72m | 12.20m x 2.50m x 2.80m | 11.86m x 2.49m x 3.05m |
| Weight | 6,709kg | 10,102kg | 17,191kg | 20,299kg |





Articulating Booms

| | 45ft | 60ft | 80ft | 130ft |
|-----------------------|--------------------------------|-----------------------------|------------------------------|------------------------------|
| Platform Height | 13.86m | 18.39m | 23.77m | 38.1m |
| Working Height | 15.86m | 20.39m | 25.77m | 40.3m |
| SWL | 227kg | 227kg | 227kg | 227kg |
| Dimensions (LxWxH) | 6.65 m x 2.29 m x 2.13 m | 0.91m x 2.46m x 2.69m | 11.27m x 2.49m x 3.00m | 11.45m x 2.49m x 3.05m |
| Weight | 5987kg | 10,215kg | 16,284kg | 19,958kg |

Self Propelled Scissor Lifts

| | 39ft | 45ft | 49ft | 59ft | 45ft | 51ft | 72ft |
|-----------------------|-----------------------------|-----------------------------|----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| Platform Height | 10.06 m | 11.75m | 13.11m | 16.15m | 11.75m | 13.70 m | 20.00m |
| Working Height | 12.06 m | 13.75m | 15.11m | 18.15m | 13.75m | 15.70 m | 22.0m |
| SWL | 1,134 kg | 350kg | 680kg | 680kg | 350kg | 250 kg | 750kg |
| Dimensions (LxWxH) | 3.94m x 2.29m x 2.71m | 2.44m x 1.19m x 2.54m | 3.94mx 2.29m x 2.93m | 5.40m x 2.29m x 3.15m | 2.44m x 1.19m x 2.54m | 2.84m x 1.25m x 2.59m | 4.95m x 2.46m x 3.86m |
| Weight | 5,482 kg | 3,221 kg | 5,936 kg | 7,537kg | 3,221 kg | 3180 kg | 13,000kg |

Lift & Shift

Genie Super Lift Advantage

Note: S.W.L. will de-rate when used with accessories.

These heavy-duty, manually operated lifts are suitable for warehouse work and on-site tasks such as ducting and ventilation installation. Available with a full range of useful accessories including extension forks, pipe cradle, boom, and platform.

- · One-man operation with silent manual winch will raise loads to heights of up to 7.6m
- · Self-sustaining friction brake holds loads safely
- · Strong yet lightweight





| Technical Specifications | | | |
|--------------------------|---------------------|---------------------|---------------------|
| Code | M5951 -SL10 | M5002 -SL15 | M5952-SL25 |
| H.O.L. | 3.05m | 4.6m | 7.6m |
| S.W.L. | 454kg | 363kg | 295kg |
| Dimension (L x W x H) | 1460 x 800 x 1990mm | 1840 x 800 x 1990mm | 2040 x 800 x 1990mm |
| Weight | 118 kg | 144kg | 204kg |

Genie Counter Balance Lifter /Stacker

Allows you to raise loads up to 4.6m. When fitted with the suction grip, large glass panels and windows up to 300kg can be installed into buildings without obtrusive base forks interfering in the installation.

- · Supplied with counterbalance weight stillage and forks
- · Counterbalance lift works right up to walls and platforms

| Technical Specifications | |
|--------------------------|---------------------|
| Code | M5964 |
| Item | Lift/Stacker |
| H.O.L. | 4.6m |
| S.W.L. | 300kg |
| Dimension (L x W x H) | 2040 x 80 x 1990mm |
| Weight | 272kg (inc weights) |















Hand Pallet Truck

This heavy duty pallet truck makes the transferring of goods on pallets easier and quicker. It increases productivity in warehouses, factories and shops while decreasing the need for manual handling. Available in normal, and long reach sizes.

- · Highly manoeuvrable
- · Has tough, nylon wheels
- · Turns 180 degrees

| Technical Specification | |
|-------------------------|---------------------|
| Code | M5971 |
| H.O.L. | 200mm |
| S.W.L. | 2000kg |
| Dimension (L x W x H) | 1220 x 520 x 1000mm |
| Weight | 68kg |

| Technical Specification | |
|----------------------------|---------------|
| Code | M8003 |
| Internal gap between forks | 220mm |
| Dimension (W x L) | 550 x 2000mmm |
| Individual Fork Width | 160mm |







Electric Chain Hoists

Our range of electrically powered chain hoists take the hard work out of raising and lowering loads through significant vertical distances.

- · Safety clutch prevents accidental overloading
- · Runs off single-phase, 110V 50Hz supply
- · Lift heights from 6m to 25m
- · Grade 80 load chain as standard





| Technical S | Specification | _ | _ | | | | | |
|-------------|---------------|-------|-------|-------|-------|-------|-------|-------|
| Code | M5782 | M5783 | M5784 | M5785 | M5786 | M5787 | M5788 | M5789 |
| S.W.L. | 0.5T | 0.5T | 0.5T | 1T | 1T | 1T | 2T | 2T |
| H.O.L. | 9m | 15m | 25m | 9m | 15m | 25m | 12m | 25m |
| Weight | 27kg | 33kg | 42kg | 62kg | 71kg | 79kg | 86kg | 117kg |

Mobile Lightweight Aluminium Gantry

A portable lightweight gantry system available for a variety of lifting applications including confined space, lift shafts, rooftops and clean environments. Its lightweight rigid design and ease of assembly makes it ideal for use in multiple locations.

- · Two man assembly
- · Lightweight rigid design
- Working load limit (WLL) is 2t goods or man ride/fall arrest

| Technical Specification | ons | | |
|-------------------------|-------|-------|--|
| Code | M5808 | M5809 | |
| Beam length | 3.9m | 2.5m | |
| Working length | 3.0m | 1.58m | |
| Weight | 133kg | 123kg | |













Panel Trolley

A Panel Trolley 4 Wheel for transporting wall boards, MDF sheets and other unwieldy difficult to carry panels.

Note: Not for use with glass

- · Choice of 2 or 4 wheel models
- Compact model features a removable upright support for easy transporting in cars and vans.

| Technical Specifications | |
|---------------------------|-------------------|
| recrimical specifications | |
| Code | M5997 |
| S.W.L. | 350kg |
| Dimensions (L x W x H) | 1.5 x 0.7 x 1.2mm |
| Weight | 41kg |











Skoots Pair

This 2 tonne Skoots Pair – 2000Kg lifting trolley is perfect for moving large and bulky items. It has easy manoeuvrability thanks to its hydraulic jacks.

- · Hire rate includes two lifting trolleys
- · Featuring built-in hydraulic jacks
- · Supplied with securing straps















 Code
 M5985

 S.W.L
 2000kg

 Size (WxH)
 510 X 1195mm

 Weight
 97kg

Shifting Skates

Nylon Shifting Skate Sets which offer the simplest way to put awkward loads 'on wheels'.

- · Steering turntable gives maximum manouverability
- · Set includes 2 rear and 1 steering skate


















Telehandler Tipping Skip

Ideal for handling and moving materials and facilitating waste management on site. With a robust body construction, reinforced body rim, robust tipping frame and a high quality paint finish the skip has been designed and manufactured to make them a fully watertight and durable skip.

- The tipping action is carried out by the driver from the cab using the hydraulics.
- It comes with Crane lifting eyes and fork sockets as standard



Technical Specifications

 Code
 M8004

 Capacity
 2000lt

 Net Weight
 400kg approx

 SWL
 2000kg

Dimensions 1800mm wide x 1100mm high x 1450mm deep









Building, Events & Siteworks

Mesh Fence Panels

A building site or premises with tools, materials, plant and other machinery can be very inviting to a thief - additionally the site could be a breakin route into adjacent properties. When you need secure temporary fencing on-site, these temporary 2.85m wide mesh panels provide site security and are a cost-effective deterrent to theft and vandalism. Supplied with rubber feet and stabilisers, the strong close mesh provides a secure barrier. Fencing is now a health and safety necessity to keep the public out and protect them from site hazards.

- · Hire rate includes backstays
- · Pedestrian and vehicle gates are easily fitted
- · Ideal for event crowd control
- · Panels conform to HS (G) 151

| | | | أبافر | | |
|----|------|---|-------|-------------|---|
| | | | API | | İ |
| | | | | 1 | H |
| WW | | - | | | L |
| - | | | | Today | |
| | | | | | |
| | | | | | |
| | | - | | | |
| | . 12 | | | | |
| | | | | Crept House | |
| | | | | | |

Useful for:

Providing Security Crowd Control







| Technical Specifications | | | | |
|--------------------------|----------------|--------------|-----------------|--|
| Code | M6089 | M6091 | M6092 | |
| Item | Mesh Panel Kit | Vehicle Gate | Pedestrian Gate | |

Pedestrian Barriers

Constructed from tough, strong galvanised steel, these 2.4m long barriers are ideal for pedestrian control. Barriers can be interlocked to form an effective chain that can be easily erected and dismantled.

| Technical Specification | |
|-------------------------|---------------|
| Code | M5520 |
| Dimensions (L x H) | 2300 x 1100mm |
| Weight | 14/16kg |





2m Guard Barriers

Designed to be linked together, each 1 metre high free standing guard barrier has a topfaced reflective material on one side. Ideal for placing around temporary roadworks, groundwork and open excavations.

- · HDPE construction, high impact strength and durability
- · Stacks in 50mm (2 inch) with location (40 per

| Technical Specifications | | | | |
|--------------------------|----------------------------|--|--|--|
| Code | M5516 | | | |
| Dimensions (L x W x H) | 2000 mm x 560 mm x 1075 mm | | | |
| Weight | 12kg | | | |









Pressure Washer & Bowser

Clean site equipment with this combined pressure washer and bowser. The bowser supplies a water supply for over an hour's continuous use.

| Technical Specifications | | | | |
|--------------------------|--------------------------------|--|--|--|
| Code | M5678 | | | |
| Water Capacity | 1100L, 250g | | | |
| Dimensions (L x W x H) | 3500 x 1560 x 1350mm | | | |
| Fuel | Diesel | | | |
| Weight | 450kg (unladen) 1500kg (laden) | | | |













Compact Pressure Washer & Bowser

This powerful compact pressure washer and bowser is designed for hard to reach areas and provides approx. 12 minutes constant washing time away from a water source.

Technical Specification

| Code | M5683 |
|-------------------------------|---------|
| Pressure (at full flow) | 1500psi |
| Water Flow (at full pressure) | 9L/min |
| Tank Capacity | 150L |
| Fuel | Petrol |













Enduramat

The enduramat is an ideal ground cover solution for accessing construction sites and events where soft ground or flooring needs to be protected from site vehicles or the general public.

- · Mats measure 2440mm x 1220mm
- Simple and quick to install with easy to use connectors
- · Hand cut-outs aid two man loading
- Reversible non-slip surface feature one side for pedestrain use and the other for vehicles
- · 100% recyclable material



Technical Specification

 Code
 M5685

 Dimensions (L x W)
 2440 x 1200mm

 Thickness
 19mm

 SWL
 35kg



Bunded Diesel Fuel Bowsers

These fully bunded road towable diesel bowsers are legal for towing up to 950L of diesel on the road. The feed and return points provide a constant fuel supply for larger generators. Recommended for refuelling of site equipment.

Bunded base prevents fuels leaking into the environment



| Technical Specifications | | | | |
|--------------------------|-----------------------------|-----------------------------|--|--|
| Code | M5684 | M5688 | | |
| Capacity | 500L, 110 gallons | 950L, 210 gallons | | |
| Dimensions (L x W x H) | 2920 x 1340 x 1420mm | 3500 x 1550 x 1700mm | | |
| Weight | 450kg unladen;; 900kg laden | 525kg unladen; 1500kg laden | | |



Steel Props

Rugged adjustable supports for formwork during construction as well as floors, walls and ceilings.

- · Made from extra strong, tubular steel
- · Telescopic height adjustment

| Technical Specifications | | | | |
|--------------------------|--------|--------|--------|-------|
| Code | M5466 | M5467 | M5468 | M5469 |
| S.W.L | 1700kg | 1500kg | 1000kg | 700kg |
| Height (closed) | 1.1m | 1.8m | 2.6m | 3.2m |
| Height (extended) | 1.8m | 3.0m | 3.9m | 4.9m |
| Weight | 12kg | 17kg | 22kg | 29kg |











The heavy duty steel plate construction of this Site Storage Box means that it is virtually impregnable to all but the most sophisticated thief. Keep tools stored on-site safe from thieves, unauthorised users and the weather with these secure portable tool stores.

| Technical | Specification |
|-----------|---------------|
| | |

Code M5484 Dimensions 1.2 X 0.9 X 0.6m Weight











NOT SURE WHAT PRODUCT YOU NEED FOR THE JOB?

Call or drop into your local HSS branch and they will be happy to give you guidance.

Rubble Truck

The heavy duty steel plate construction of this Site Storage Box means that it is virtually impregnable to all but the most sophisticated thief. Keep tools stored on-site safe from thieves, unauthorised users and the weather with these secure portable tool stores.



Technical Specification

Code M6000 S.W.L 750ka Internal Dimensions (LxWxH) 750 x 1460 x 865

Weight 88.5kg









Site Chemical Store

This site chemical store will keep your hazardous materials safe and secure on-site.

· Fitted with a 50L leak tray and drain taps and castor wheels



| Technical Spe | ecification |
|---------------|-------------|
| Code | M. |

M5485 M5488 Yes Castors No

Dimensions (LxWxH) 1275 x 675 x 1275mm 1275 x 675 x 1275mm Weight 170kg 170kg









Plant

Wide range of high quality Plant available for hire or sale including the below:

- Excavators
- · Dumpers
- · Rollers
- · Teleporters
- Forklifts
- · Skid Steer Loaders
- · Portaloo's
- · Towable Welfare Units





NEED SOMETHING ELSE?

WE WILL TRY OUR BEST TO SOURCE IT FOR YOU.







Accommodation

Accommodation solutions at your fingertips, from offices, canteens and drying rooms to toilet blocks, welfare units and emergency showers available for long or short term hire.

We offer secure and reliable accommodation to meet the needs of modern day construction sites.





Concreting & Compaction

Tip-Up Concrete Mixers

The rotating, tilting stand of our mixers allows you to mix up to 85 litres of concrete or mortar and tip it straight into a barrow. Compact and lightweight, they can be moved easily though doorways. Ideal for both DIY and professional use - can be handled by one person.

- · Will mix 85 litres in approximately 6 minutes
- · Choice of electric (110v/240v) or petrol mixer
- · Mixture can be tipped straight into a barrow
- · Petrol is NOT supplied with this item
- · Cleaning charges may apply
- · C02 emission free, no exhaust fumes versus petrol mixer

| Technical Specifications | | | | |
|--------------------------|------------------------------------|--|--|--|
| M5290 | M5291 | M5294 | | |
| 110V | 240V | Petrol | | |
| 630W | 630W | Recoil start 4 stroke unlead petrol | | |
| 85 Litres | 85 Litres | 85 Litres | | |
| 79kg | 79kg | 83kg | | |
| | M5290 110V 630W 85 Litres | M5290 M5291 110V 240V 630W 630W 85 Litres 85 Litres | | |





Useful for:

Laving a shed base Paving slabs or stepping stones **Building walls**

Cementing a driveway **Pouring floors**

Medium sized projects

Bulk Concrete Mixer Diesel

A heavy-duty, diesel powered, trolley-mounted Bulk Concrete Mixer Diesel perfect for mixing mortar or concrete in bulk on site.

- · Takes just 6 minutes to mix 110 litres
- · Easy wheel operated emptying

| Technical Specifications | |
|--------------------------|------------|
| Code | M5297 |
| Engine / Fuel | Diesel |
| Drum Capacity | 110 Litres |
| Weight | 390kg |















Vibrating Wacker Plates

Our Light or medium vibrating wacker plates are perfect for compacting hardcore, sand or gravel. Lifting points and front lift cage allow easier loading and unloading

- · Petrol and 110v models available
- Low HAV design allows longer, safe using times
- C02 emission free, no exhaust fumes versus petrol vibrating plate



| Technical Specifications | | | | |
|--------------------------|---------------------------------------|-------|-------------|--|
| Code | M5408 | M5411 | M5414 | |
| Engine/Fuel | Recoil start 4 stroke unleaded petrol | | Diesel | |
| Plate Size (W x L) | 320 x 574mm 400 x 606mm | | 400 x 703mm | |
| Weight | 59kg | 84kg | 154kg | |



Useful for:

Maintenance & Repair work

Compact hardcore, sand, gravel, soil or tarmac

Make a smooth surface ready to lay artificial grass

Create a pathway or driveway Filling potholes

Laying a greenhouse/shed base

Floor Tile Stripper

Not only can you use this Floor Tile Stripper for lifting floor tiles, lino, carpet, or vinyl floor planks, but also for chipping off mortar, scraping plaster, glue residue and foam backing from concrete floors, as well as other build-ups that need removing ready for you to lay new flooring. Take the pain out of trying to do the job by hand. The blade angle can be adjusted according to the type of floor covering.

- \cdot High-frequency vibrating blade
- Fully adjustable blade angle to suit flooring and adhesion

| Technical Specification | | |
|-------------------------|-------|--|
| Code | M5656 | |
| Voltage | 110V | |
| Power Rating | 1100w | |
| Weight | 45kg | |











High Frequency Poker

A portable, lightweight high frequency poker for fast compaction of wet concrete.

- · Flexible 3m long drive shaft
- 39mm Diameter Head Ideal for columns and beams
- 58mm Diameter Head Ideal for larger concrete pours

| Technical Specifications | | |
|--------------------------|-------|-------|
| Code | M5391 | M5390 |
| Diameter | 39mm | 58mm |
| Voltage | 110V | 110V |
| Shaft Length | 3m | 3m |
| Power | 1000W | 1000W |
| Weight | 1.9kg | 5kg |





Floor Saw

For continuous cutting through concrete and masonry pavements, roads or motorways, we have a comprehensive range of floor saws for all professional contractors.

Note: Petrol is NOT supplied with this item

| Technical Specifications | | |
|--------------------------|----------------------|-------------------|
| Code | M5299 | M5300 |
| Engine/Fuel | Recoil start 4 strok | e unleaded petrol |
| Cutting Depth | 127mm | 165mm |
| Disc Size | 350mm | 450mm |
| Weight | 87kg | 135kg |





Lighting

Trime X-Eco Lighting Tower



Equipped with 6x160W LED floodlights and a fuel-efficient diesel engine, the X-ECO Lighting Tower is ideally suited for outside events, highway contracts and construction projects.

- 6x160W LED lights
- · 8.5 m hydraulic mast
- · 110-litre tank capacity
- · Up to 200 hours of running time







| Technical Specification | |
|-------------------------|----------------------------|
| Code | M5622 |
| Fuel capacity | 110 litre |
| Lamp type | LED |
| Run time | 200 hours |
| Weight empty | 920 kg |
| Minimum dimensions | 2320 x 1380 x 2420 (LxWxH) |
| Maximum dimensions | 2390 x 2390 x 8500 (LxWxH) |
| Noise level | 65dBA @ 7m |

Self-Righting LED Work Light

Used as a single light or can be linked together to form an effective light chain. Delivering a broad, near shadow-free illumination perfect for plastering, and general decorating jobs.

- · Filled with a 5m cable and 16A power socket
- Energy saving LED technology uses less power and reduces energy consumption

| Technical Specification | |
|-------------------------|-------|
| Code | M5630 |
| Voltage | 110V |
| Power | 20V |
| Weight | 6.5kg |





LED Smith Light

This battery powered LED light is both versatile and energy efficient making it the greener alternative to traditional halogen, fluorescent and incandescent lighting.

- Double-sided pivoting head gives all round illumination of up to 1,480 lumens
- · Low heat output
- \cdot Energy saving LED technology uses less power & reduces energy consumption

| Technical Specification | |
|-------------------------|---------------|
| Code | M5634 |
| Voltage | 240V(charger) |
| Wattage | 30 Watts |
| Run Time | 9 hours |
| Open Height | 1100mm |





Single & Twin Head Tripod Lights

These LED floodlights emit a cool white light (6500k). An ideal solution for larger working environments, reducing the appearance of shadows. Energy saving LED tech uses less power & reduces energy consumption.

| Technical Specification | ns | |
|-------------------------|------------|------------|
| Code | M5610 | M5611 |
| Item | Twin | Single |
| Voltage | 110V | 110V |
| Power Rating | 2 x 30W | 30W |
| Mast Height | 1.7 - 2.4m | 1.7 - 2.4m |
| AMP | 16a or 32a | 16a or 32a |





Safety

Fall Arresters & Retrieval Blocks

This equipment is designed for use as an arrest retrieval system. Do not use for raising or lowering of personnel. Lanyards with shock absorbers should not be used with inertia reels.

- · Arrester Block: Immediately arrests any fall without jarring.
- · Retrieval Block: Immediately arrests falls and allows personnel to be winched back to safety.












| Technica | al Specifications | | | | |
|----------|--------------------|--------------------|--------------------|---------------------|---------------------|
| Code | M6046 | M6033 | M6035 | M6037 | M6036 |
| Item | Arrester Block 10m | Arrester Block 14m | Arrester Block 20m | Retrieval Block 20m | Retrieval Block 14m |
| Weight | 5kg | 11kg | 8.5kg | 13kg | 17kg |

Personal Gas Detector

A reliable multi-gas detector that measures O2, H2S, CO and combustible gas. It's rugged housing provides unsurpassed durability, including the ability to withstand a 6 m drop test onto concrete. With Large, glove-friendly buttons and a high-contrast display, the ALTAIR 4X is easy to operate.

- · 24-hour battery run time.
- · Greater signal stability and repeatability
- · MotionAlert and InstantAlert.





Fume Extractor Cart

Featuring a built-in filter unit, this compact extractor is ideal for repair workshops where temporary welding operations require a fume extraction and filtration facility.

· Supplied with a 3m fume extractor hose, gas filter and built-in spotlight.

| Technical Specification | | |
|-------------------------|-------|--|
| Code | M5538 | |
| Voltage | 110v | |
| Duct Length | 3m | |
| Weight | 78kg | |











Fume Extractor

Remove dust, fumes and increase air circulation in garages and workshops with this versatile and portable ducted fan. Supplied with 6m of ducting.

· Additional ducting lengths available.

| Technical Specification | |
|-------------------------|------------|
| Code | M5586 |
| Voltage | 110v |
| Power | 750w |
| Max Airflow | 3470m³/hr |
| Weight | 15kg |
| AMP | 16A or 32A |









Mobile Emergency Safety Shower

Essential for situations where persons may be exposed to spilling, splashing or spraying of chemicals or hazardous substances. Perfect for use when a mains water supply cannot be guaranteed.

| gaararreed. | | |
|-------------------------|------------------------------------|--|
| Technical Specification | | |
| Code | M5251 | |
| Capacity | 114 L/30 US gal | |
| Water Inlet | 1/2" quick release hose connector | |
| Operating Pressure | 3 to 5.5 BAR G / 43 to 79 PSI | |
| Dimension (WxDxH) | Assembled: 734mm x 1462mm x 2315mm | |
| Weight | 80kg | |




Tripod Access System

This portable Tripod Access System is designed to safely lower a person or materials into manholes, shafts and other confined areas. It is equipped with a 50 m winch and a 20 m retrieval block.

- · Supplied with heavy duty man riding winch, retrieval block and bosun's chair
- · Accepts loads up to 136 kg







Roofman Anchors

When it's not practical to set up the guard rails normally required to ensure safety when working on flat roofs, then you can use a one man fall protection system that lets you do just that in absolute safety, like this Roof Man Anchor.



- · Unique surface mounted anchor
- Hire Pack Includes Anchor and Arrester Block (M6046) -Fall Arresters & Retrieval Block System should be used for edge work.



| Technical Specification | | |
|-------------------------|---------|-----------------|
| Code | M6039 | M6909 |
| | One Man | Two Man |
| Weight | 136kg | 367 kg +/- 2 kg |

Breaking & Drilling

Hilti TE700 Medium Duty Breaker

This medium duty breaker is built for comfort and has been specially designed for extensive interior renovation work.

- · Lowest vibration volume of its class
- · Well balanced symmetrical shape
- · Recommended for use with our M-Class dust extractor
- · Ideal for removing plaster

| Technical Specification | | | |
|----------------------------|-------------------------|--|--|
| Code | M5099 | | |
| Voltage | 110V | | |
| Power | 1300W | | |
| Hammering Frequency | 2760 impacts per minute | | |
| Single Impact Energy | 11.5 J | | |
| Weight | 7.9kg | | |
| Active Vibration Reduction | Yes | | |
| Reduced impact energy | Yes | | |
| | | | |





Hilti TE1000 Breaker

This versatile breaker has 50% less vibration than conventional models, reducing user fatigue and enabling usage times to be considerably increased therefore providing high productivity.

- · Chisels up to 1.3m3 of masonry per minute.
- · Light and easy to operate

| Technical Specification | | |
|-------------------------|-------|--|
| Code | M5035 | |
| Breaking Capacity | 1600W | |
| Voltage | 110V | |
| Weight | 11kg | |













Hilti TE2000 Vibration Damped Breaker

The Hilti TE 2000 AVR medium duty breaker delivers powerful performance equal to competitor breakers in the 30kg weight class, at virtually half the weight. It can break up to 3 tonnes of concrete per hour. The TE 2000 can be used for breaking out channels for laying pipe, removing concrete for rebar connections and demolition of concrete slabs and foundations.



| Technical Specification | |
|----------------------------|-------------------------|
| Code | M6326 |
| Voltage | 110V |
| Power | 1760W |
| Single Impact Energy | 35J |
| Hammering Frequency | 1800 impacts per minute |
| Weight | 14.5kg |
| Active Vibration Reduction | Yes |
| Reduced Impact Energy | Yes |













Hilti TE3000 Heavy Duty Breaker

The mighty TE 3000 AVR heavy duty breaker brings impressive hammering power to big concrete demolition jobs. This breaker is very versatile and can be used for breaking up concrete and asphalt for road building, repair work & pipe laying.

- · Breaking performance of up to 6 tonnes of concrete per hour
- Includes transport trolley
- · C02 emission free and low noise versus petrol breaker and hydraulic breaker

| Technical Specification | |
|----------------------------|------------------------|
| Code | M5113 |
| Voltage | 110V |
| Power | 1760W |
| Single Impact Energy | 68J |
| Hammering Frequency | 860 impacts per minute |
| Weight | 29.9kg |
| Active Vibration Reduction | Yes |
| Reduced Impact Energy | No |















Cordless Hammer Drill

The Hilti TE6-A36 AVR Cordless Rotary Hammer is a lightweight and well balanced drill for concrete, stone and masonry. It drills to a depth of 20mm.

- · Lightweight with variable speed control
- · Comfortable use over long periods
- · Robustly built and superbly engineered for cordless optimization



| Technical Specification | | |
|--------------------------|------------------------|--|
| Code | M5040 | |
| Voltage/Battery Capacity | 36V/3.3Ah | |
| Power | Rechargeable batteries | |
| Single Impact | 2J | |
| Hammering Frequency | 5283 impacts / minute | |
| Drilling Range | 5-20mm | |
| Weight | 4kg | |



Hilti TE80 Heavy-Duty Atc Combi-Hammer

Precise control and operator comfort is guaranteed with the heavy duty ATC combihammer, this machine is capable of hammer drilling up to 150 mm cores in concrete, stone and masonry.

- · Ideal for SDS max drill bits between 20-40mm
- · Active torque control (ATC) is an advanced safety feature which protects the user

| Technical Specification | |
|----------------------------|-----------------------|
| Code | M5037 |
| Voltage | 110V |
| Power | 1700W |
| Single Impact Energy | 11.5J |
| Hammering Frequency | 4600 impacts / minute |
| Drilling Range | 20-40mm |
| Weight | 9.7kg |
| Active Vibration Reduction | Yes |













Two Tool Air Compressor

This air compressor is designed to be compact, efficient, economical and easy to operate.

- · Fitted with air fuses for operators safety
- · Electric start diesel engine
- · Bunded base 110% of capacity prevents fuel and oil leaking into the environment





Code M5193 Engine Electric-Start Fuel Diesel Max.Air Pressure 101psi

Air Delivery 125cfm (3540l/minute)











Electric Air Compressor

Whether you are paint spraying or powering air tools, choose from our wide range of electric and petrol driven compressors.

- · Choice of petrol engined and electric units
- · Integral receiver tanks and water separators



Code M5696 Engine Electric Voltage 240/110V Max.Air Pressure 116-150 psi

Air Delivery 8-9cfm 227-250 L/min











Sawing & Cutting

Con Saw

Note: Cut-off saws will break down if the incorrect fuel mix is used and charges may be incurred.

If you are cutting bricks, blocks, concrete, stone, roof tiles or metalwork on-site, these saws are the professional's choice. Lightweight and ergonomic, with an outstanding power-to-weight ratio and exceptionally low vibrations (below 2.5 m/s²) means you can work for up to 8 hours without having to worry about vibration monitoring.



- · 2 sizes available 300mm (12") and 350mm (14")
- · Dust suppression kit available
- · 2-stroke premix fuel available for sale



| Technical Specifi | cations | | |
|-------------------|---|--|---------------------------|
| Code | M5156 | M5158 | M5157 |
| Item | 12" Con Saw | 14" Con Saw | Water bottle /dust kit |
| Engine | Recoil-start, 2-stroke | Recoil-start, 2-stroke | |
| Fuel | Unlweaded petrol + 2- stroke oil mix | Unleaded petrol + 2- stroke oil mix | |
| Max Cut Depth | 125mm | 100mm | |
| Disc Size | 350mm | 300mm | |
| Weight | 11kg | 9.4kg | |

Blades

Blades for hire or sale in 300mm and 350mm sizes. Suitable for cutting a wide variety of materials including concrete, reinforced concrete, building materials and asphalt.



| Technical Specifications | | | | |
|--------------------------|----------|---------|----------|---------|
| Code | M5178 | M5179 | M5176 | M5732 |
| Diameter | 300mm | 300mm | 350mm | 350mm |
| Material | Concrete | Asphalt | Concrete | Asphalt |

Angle Grinders

For grinding and cutting masonry or metal, or raking out mortar joints. These are just some of the jobs our versatile, professional electric angle grinders can help you tackle.

- · Low weight for optimum handling
- · 110V and cordless options available
- · Dust adapter option for 125mm models
- · Cutting discs available for 125mm models ask in branch for more information

















| Technical Specifications | | | |
|--------------------------|-------|-------|----------------|
| Code | M5135 | M5134 | M5182 |
| Voltage | 110V | 110V | 22v battery x2 |
| Cutting Depth | 64mm | 34mm | 34mm |
| Disc Size | 230mm | 125mm | 125mm |

Chasing Machine

When running pipes, conduits or cables, cutting accurate chases in brick and masonry is easy with our diamond-wheel machine.

· 125mm diameter discs for splitting depths up to 40mm and widths up to 46mm.

Note: We recommend using the Hilti Dust Extractor.

| Technical Specification | |
|-------------------------|-------|
| Code | M5174 |
| Voltage | 110V |
| Power Rating | 1700W |
| Disc Diameter | 125mm |
| Max. Cutting Width | 46mm |
| Max. Cutting Depth | 40mm |
| Weight | 6.9kg |















Masonry Saw Bench

Cutting bricks, blocks, slabs, tiles and even metal in bulk on site? This Electric Masonry Saw is a powerful, reliable, and very easy to operate which makes it perfect for the intermittent wet and dry cutting of a wide variety of small masonry materials, concrete products, roof tiles etc.

- · Provides fast and powerful cuts on materials up to 600mm
- · Wide 500x540mm conveyor cart, long reinforced frame
- · High accuracy cutting guide with per-degree angular setting

| Technical Specification | |
|----------------------------------|---------------------|
| Code | M5162 |
| Voltage | 110V |
| Power Rating | 2200W |
| Max Cut Length | 670 mm |
| Max. Cutting Depth at 90 degrees | 135 mm |
| Max. Cutting Depth at 45 degrees | 94 mm |
| Table Size | 500 x 540 mm |
| Dimensions (LxWxH) | 1187 x 620 x 740 mm |













Sanding & Fixing

Floor Sander

Renovating old board, traditional parquet and block wooden floors is easy with this purposemade, heavy-duty drum floor sander, removing imperfections, old finishes and most decorative stains to leave the surface ready for varnishing or polishing.

Note: Must be used with a disposable dust bag.

- · Sanding sheets are not included and sold separately
- · Breaks in to three components making it easy to transport

| Technical Specification | | | |
|--------------------------------------|-------------------|--|--|
| Code | M5109 | | |
| Voltage | 240V | | |
| Power | 1920W | | |
| Weight | 42kg | | |
| Dimensions ($W \times D \times H$) | 322 x 940 x 855mm | | |















Floor Edging Sander

Sands wooden floors right up to the skirting board to tackle those parts of board, traditional parquet and block floors our floor sander can't reach.

· Sanding discs are not included and are sold separately

Technical Specification Code

M5110 240V Voltage Weight 14.5kg

Dimensions (WxDxH) 276 x 505 x 325mm















Floor & Edge Sander Hire Pack

The Floor and Edge sander is also available in a Hire Pack to help you get the job done with ease.

| Technical Specification | |
|--------------------------------|---------------------------------|
| Code | M5111 |
| Item | Floor and Edge Sander Hire Pack |
| Voltage | 240V |
| Combined Weight | 56.5kg |





Drywall Sanding Kit

Whether you are sanding joints in plasterboard or removing old finishes, this purpose-made, 5-speed plaster-sander tackles the job up to four times faster than conventional methods.

- · Supplied with extraction unit and hose for dust-free operation
- · Head swivels for sanding ceilings
- · Reaches up to 3m
- · Drywall sanding pad available for sale (sold separately)
- · We recommend using with a dust extractor vacuum

| Technical Specification | on . |
|-------------------------|-------|
| Code | M6299 |
| Voltage | 110V |
| Power | 300W |
| Disc Diameter | 225mm |
| | |





NOT SURE WHAT PRODUCT YOU NEED FOR THE JOB?

Call or drop into your local HSS Hire Ireland branch and they will be happy to give you guidance.

Painting & Decorating

Professional Wallpaper Stripper

The fast, effective way to remove all types of wallpaper, vinyl, woodchip & decorative wall coverings leaving a clean surface for redecoration, without damaging the plaster.

- Stripper has a step built in to the cage for hard to reach areas
- On-board storage makes this unit compact & portable

| Technical Specification | | |
|-------------------------|-----------------------|--|
| Code | M5689 | |
| Voltage | 240V | |
| Power | 2750W | |
| Tank Capacity | 7.5L | |
| Base Plate | 253 x 305mm | |
| Hose Length | 5m run cool anti-kink | |
| Weight (dry) | 8.7kg | |

Large 7.5 litre tank capacity allows up to 90 mins of stripping





Portable Airless Paint Sprayer

For painting shops, warehouses, small offices and homes, inside and out, this portable airless spray unit is quicker than using traditional paintbrush or roller and can be used with most emulsions and resin-based paints.

- \cdot Spray gun with 15m hose
- Suction feed takes paint from bucket or paint container

| Technical Specification | |
|-------------------------|----------------|
| Code | M5691 |
| Max. Tip Size | 0.53mm (0.021) |
| Power | 1100W |
| Voltage | 110V |
| Pump Volume | 1.74LPM |
| Weight | 19kg |





Surveying & Location

Exterior Rotating Laser

The Hilti PR 2-HS is resistant to water, impact and dust, so it is ideally suited for tough conditions in any environment. One button, one function makes the tool extremely easy to operate

- Pulse Power Technology means this machine is unaffected by the sun and other lights sources
- Digital measurement indicates advises operator precisely how much measurement deviates from target value

| 755 | |
|-----|----|
| | |
| | |
| 7 | A- |
| | |

| Technical Specification | | | |
|------------------------------------|--------------------|--|--|
| Code | M5443 | | |
| Accuracy | ±0.5 mm at 10 m | | |
| Operating time with Li-ion battery | 30 h | | |
| Slope types | Single | | |
| Weight with batteries | 2.5 kg | | |
| Dimensions (LyWyH) | 200 x 200 x 230 mm | | |

Hilti PR 300 HV2S Dual Grade Rotating Laser

Precise and accurate, reducing the risk of any costly errors. It is made to withstand a tripod drop of up to 1.5 m, so is ideally suited for tough conditions in any environment.

- Monitors and corrects vertical laser at regular intervals for reliable performance
- · Allows for fast, automatic laser alignment at up to 150m making use of this item a 1 man job

| Technical Specification | |
|------------------------------------|--------------------|
| Code | M5444 |
| Accuracy | ±0.5 mm at 10 m |
| Operating time with Li-ion battery | 25 h |
| Slope types | Dual |
| Weight with batteries | 2.5 kg |
| Dimensions (LxWxH) | 200 x 200 x 230 mm |



Hilti PR 30-HVSG Interior Green Rotating Laser

This easy to use laser is 4x brighter than conventional red-beam lasers with better visibility when working across long distances or in brighter environments. It is made to withstand harsh onsite conditions.

 Rotating laser beam can be switched via infrared remote control at any time to a stationary laser line able to shift in the horizontal and vertical planes



| Technical Specification | | | |
|-------------------------|---------------|--|--|
| Code | M5442 | | |
| Accuracy | ±1 mm at 10 m | | |
| Operating time | 16 h | | |
| Self-leveling range | ±5° | | |
| Weight with batteries | 2.5 kg | | |
| Rated voltage | 10.8 V | | |

Hilti POL 15 Optical Level

Equipped with a high end lens that delivers a magnification of 28x efficiency. A simple optical device used in daily levelling tasks, it has a robust construction can withstand extreme working conditions making this ideally suited for various environments.

- · High Quality optics
- · High Quality mechanisms for smooth, easy operation
- Automatic compensator for accurate levelling



| Technical Specification | |
|--|--------------------|
| Code | M5445 |
| Height accuracy | ±1.5 mm at 30 m |
| Compensator type | Air-damping |
| Standard deviation (1 km double levelling) | 2 mm |
| Weight with batteries | 1.8 kg |
| Dimensions (LxWxH) | 190 x 130 x 136 mm |

Hilti PR 300 HV2S Dual Grade Rotating Laser

Precise and accurate, reducing the risk of any costly errors. It is made to withstand a tripod drop of up to 1.5 m, so is ideally suited for tough conditions in any environment.

- Monitors and corrects vertical laser at regular intervals for reliable performance
- · Allows for fast, automatic laser alignment at up to 150m making use of this item a 1 man job



| Technical Specification | | | |
|------------------------------------|--------------------|--|--|
| Code | M5444 | | |
| Accuracy | ±0.5 mm at 10 m | | |
| Operating time with Li-ion battery | 25 h | | |
| Slope types | Dual | | |
| Weight with batteries | 2.5 kg | | |
| Dimensions (LxWxH) | 200 x 200 x 230 mm | | |

Leica Rugby 620 Exterior Rotating Laser

A horizontal laser with manual grade capability Designed for general contractors who mainly perform formwork and concrete applications.

- Fully-automatic operation with the Leica Rod Eye receivers.
- Perform single slope applications using the manual grade control

| © ○ □ □ | 4 |
|---------|---|



| Technical Specification | |
|-------------------------|------------------|
| Code | M5443 |
| Accuracy | ± 2.2 mm at 30 m |
| Laser Type | 635 nm (red) |
| Rotation | 10 rps |

Prexiso Green Laser Kit

The bright green-beam is much brighter than standard red-beam. Shows digitally the height difference in millimeter of the zero line of the receiver to the rotating laser without calculation

· Easy variable speed selection (max: 600RPM) and manual scan angles

Digital laser receiver- for easy finding of level during application




| Technical Specification | |
|-------------------------|--------------|
| Code | M5435 |
| Levelling Range | ±5 degrees. |
| Laser Type | 635 nm (red) |
| Max Diameter Range | 600m |

Signal Generator Cat4Plus

This portable, powerful Signal Generator Cat4Plus is extremely useful for any excavation. It sends out a diverse range of signals which will help to accurately determine underground utility locations. It provides a map so that you can dig safely and without any damage to gas pipes, water pipes, fibre optic cabling, network cabling and other utilities.

- · Simple to use
- · Very robust
- · High strength neodymium magnet

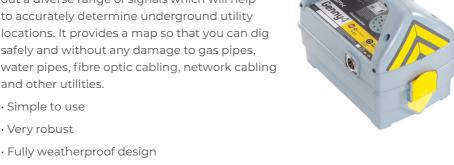

| Technical Specification | |
|-------------------------|-----------------------------|
| Code | M5454 |
| Range | 5 - 7m dependant on locator |
| Dimensions (L x D) | 102mm x 38mm diameter |

Cable Avoiding Tool Cat4Plus

Need to avoid underground service pipes or power cables? The CAT 4plus range can help you to locate them in a quick, safe and accurate way. You can trace smaller cables and avail of overload protection which filters out high levels of noise interference.

· Also with the option of StrikeAlert and Data logging.



| Technical Specification | |
|-------------------------|-------|
| Code | M5455 |
| Max Detection Depth | 4m |
| Weight | 3kg |

Duct Rods

High strength rod which is flexible enough to cope with bends yet sufficiently rigid to push-feed through pipes, ducting channels or behind machinery and other obstacles. Manufactured from fibre glass.

- · Facilitates cable laying without excavation
- \cdot Tapered end with pulling rope eye

| Technical Specification | | |
|-------------------------|-------|--------|
| Code | M6012 | M6013 |
| Frame Width | 800mm | 1050mm |
| Frame Height | 915mm | 1180mm |
| Frame Depth | 295mm | 530mm |
| Rod Working Length | 120m | 250m |
| Rod Diameter | 9mm | 11mm |
| Weight | 23kg | 54kg |



Handheld Thermal Imaging Camera

This becomes especially important in the winter, helping to identify where heat is escaping from your home or business, and any moisture issues that aren't visible to the eye.

- · Detect drafts & poor insulation before they become costly heating problems
- · Spot moisture or leaks that could lead to mould
- · Check underfloor heating and pipes safely

| · High Image Quality ai | nd 4 Image modes. | |
|-------------------------|-------------------|--|
| | | |
| | | |
| T 1 : 16 : 'C' :: | | |
| Technical Specification | | |
| Code | M7000 | |
| | | |



Pipe Inspection Camera

This Pipe Inspection Camera System is designed for inspection of sewer, pipe, air ducts, underground cable pipes, etc

· Equipped with a 1080P AHD 23mm camera head, 20-40m fiberglass cable and 7"/10" LCD monitor with SD card recording

| Technical Specification | |
|-------------------------|-------|
| Code | M6999 |



5m Inspection Camera

Laserliner Video Scope 5m Inspection Camera with LED Illumination.

| Technical Specification | | |
|-------------------------|-------|--|
| Code | M6980 | |
| Probe Length | 5m | |
| Probe Diameter | 9mm | |
| Illumination Type | LED | |
| Minimum Focus Distance | 10mm | |



Cooling

Evaporative Cooler



These evaporative coolers are suitable for a variety of locations including shops, warehouses, factories and large areas. Available in two sizes.

- \cdot Can reduce room temperature by up to 14°C
- \cdot Powerful 2700 m³ per hour airflow directed through both louvres
- \cdot Provides natural cooled air for areas up to $53 m^2$
- · Mobile and easy to set up



| Technical Specifications | | | |
|---------------------------|-------------------|--------------------|--|
| Item | Medium | Large | |
| Code | M5581 | M5582 | |
| Power | 240V | 240V | |
| Wattage | 220W | 300W | |
| Cooling Area | 57m ² | 80m² | |
| Water Capacity | 40L | 50L | |
| Dimensions (L x D x H) | 620 x 375 x 686mm | 700 x 466 x 1017mm | |
| Weight | 15kg | 18kg | |

Power Fan

The power fan is a fully portable industrial cooler. It provides high-performance cooling in both commercial and industrial applications.

- · Ideal for warehouses, factories, marquees and offices
- · High level fans available
- · Adjustable fan height
- · Variable fan speeds



| Technical Specifications | | | |
|--------------------------|-----------------------|-----------------------|----------------------|
| | | | High level power fan |
| Code | M5592 | M5593 | M5594 |
| Power | 240V | 110V | 110V/240V |
| Max Output | 9100m ³ /h | 9100m ³ /h | 9100m³/h |
| Motor | 780W | 780W | 780W |
| Height | N/A | 850mm | 1.4m-2.1m |



Compact Air Conditioner

Sleek and modern mobile air conditioning unit which will cool down offices, computer and conference rooms. With castors fitted this compact air conditioner can be moved easily from room to room. Supplied complete with exhaust vent and hose.



| Technical Specification | |
|-------------------------|-------------------|
| Code | M5609 |
| Voltage | 240V |
| Cooling area | 25m ² |
| Cooling capacity | 3.2kW |
| Dimensions (H x W x D) | 775 x 375 x 442mm |
| Weight | 40kg |



Heating

Infrared Heater





Suitable for a variety of locations including shops, factories, warehouses and offices. These heaters provide instant, localised fume free warmth.

- · Projects heat up to 6m
- · Single or twin heat settings
- · Castors for easy manoeuvrability





| Technical Specifications | | |
|--------------------------|--|--|
| Code | M5550 | M5551 |
| Heat Output | 3kW | 3kW |
| Voltage | 110V | 240V |
| Power | 3kW Continuous | 3kW Continuous |
| BTU/h | 10236 | 10236 |
| Lamps | 2X 1.4Kw Slim Line Ruby Quartz Halogen | 2X 1.4Kw Slim Line Ruby Quartz Halogen |
| Frequency | 50Hz | 50Hz |
| Dimensions (L x W x H) | 500 x 460 x 1000mm | 500 x 460 x 1000mm |
| Material | Medium Density Polyethylene (Heater Body) | Medium Density Polyethylene (Heater Body) |
| Cable Length | 3m | 3m |
| Weight | 12kg | 12kg |

Fan Heater

This portable fan heater is ideal for homes, offices, retail outlets and other occupied areas where safety is key. Built-in protection against overheating and cut off protection when knocked over.

- · Thermostatically controlled heat
- · Adjustable heater angle

| Technical Specification | |
|-------------------------|-------|
| Code | M5542 |
| Heat Output | 2.4kW |
| Power | 240V |
| BTU/h | 9553 |
| Weight | 8.3kg |





LPG Blower Heater

With the power to heat large spaces quickly, these mobile direct-fired, fan-assisted propane heaters are ideal for industrial and on-site use.

· Need no electrical supply

| Technical Specifications | | | |
|--------------------------|----------|-----------|-----------|
| Code | M5557 | M5559 | M5560 |
| Heat Output | 31kW | 44kW | 73kW |
| Power | 110V/60W | 110V/240W | 110V/240W |
| BTU/h | 105000 | 150000 | 260000 |
| Gas Consumption | 2.5kg/h | 3.25kg/h | 5.9kg/h |
| Weight | 11.5kg | 19.4kg | 29.6kg |





Fan Heater - 2kw

This portable electric self-regulating fan heater is great for providing heat quickly in cold rooms and spaces. The 2kW PTC element, which allows for energy efficiency, requires less power to maintain a constant temperature, resulting in significant energy savings over time.

| Technical Specificatio | 1 | |
|------------------------|-------|--|
| Code | M6995 | |
| Heat Output | 2kW | |
| Power | 240V | |
| Weight | 3kg | |





Fan Heater - 3KW

Industrial heavy-duty box fan heater made to withstand the rigours of regular site use. Requires a 32 amp power supply or continuous rated transformer

· Ideal for warehouses and site applications.

| Technical Specification | |
|-------------------------|--------------------|
| Code | M6996 |
| Heat Output | 2640 W |
| Power | 110V |
| Weight | 11 kg |
| Dimensions W X D X H | 310 x 300 x 355 mm |
| Air Flow | 335 (m3/h) |





3-Phase Industrial Heater-18kVA

These portable industrial fans are ideal for heating locations such as factories, warehouses, commercial buildings and other sites with three-phase supply. Can also be used for circuit load testing

| Technical Specification | |
|-------------------------|---------------|
| Code | M5543 |
| Heat Output | 9kW/13kW/18kW |
| Power | 415V |
| BTU/h | 61000 |
| Weight | 28kg |



Indirect Oil Heater

Suited to places where ventilation is limited or there is a risk to combustible materials. Can also be used for drying applications. Provides large volumes of clean warm dry air for heating large spaces such as halls, marquees and areas where people are present.

· Supplied with 5m heat ducting

| Technical Specification | | |
|-------------------------|----------|----------|
| Code | M5543 | M5555 |
| Heat Output | 72kW | 72kW |
| Power | 110V | 240V |
| BTU/h | 245000 | 245000 |
| Tank Capacity | 100L | 100L |
| Running Time | 15 hours | 15 hours |
| Weight | 121kg | 121kg |





Power

2.6kVA Petrol Generator

Perfect for providing on-site electricity for lighting & small power tools, this useful little generator is so portable it fits into the boot of most cars.

Recommended for use with an RCD plug.

Technical Specification

Code M5281
Engine Recoil Start
Fuel Unleaded Petrol
Fuel Tank Cap/Run Time 3L/3 Hours
Generated Voltage 110V / 240V
Continuous Power 2.2kW
Weight 41kg









6kVA Silenced Diesel Generator

For powering heavy duty site tools, these diesel generators are equipped with 240V and 110V sockets. Low noise emission, fitted with multisocket outlets and circuit breaker

Technical Specification

 Code
 M5 287

 Engine
 Electric Start

 Fuel
 Diesel

 Generated Voltage
 115V/230V

 No of outlets
 3x 115V/2x 230V

 Continuous Power
 4.3kW

 Fuel Tank Cap/Run Time
 24L/16 Hours





10kVA Silenced Diesel Generator

Producing over 7kVA of continuous power, this barrow mounted generator has a choice of seven 110V and 240V outlets.

Technical Specification

Code M5285
Engine Electric Start
Fuel Diesel
Generated Voltage 115V/230V
Plugs available 4x 115V/3x 230V
Continuous Power 7.2kW
Running Time 10 Hours





20 - 1000 kVA up tp 50 hrs

A range of reliable and efficient silenced generators. Also available with unlimited hours.

Please note: Our larger generators are subject to opening a HSS Hire Ireland Account.




Please call us on 1800 22 33 66, or drop into your local branch, for further details on our range of generators.

NOT SURE WHAT GENERATOR YOU NEED FOR THE JOB?

Our friendly team will be happy to assist and provide some guidance.



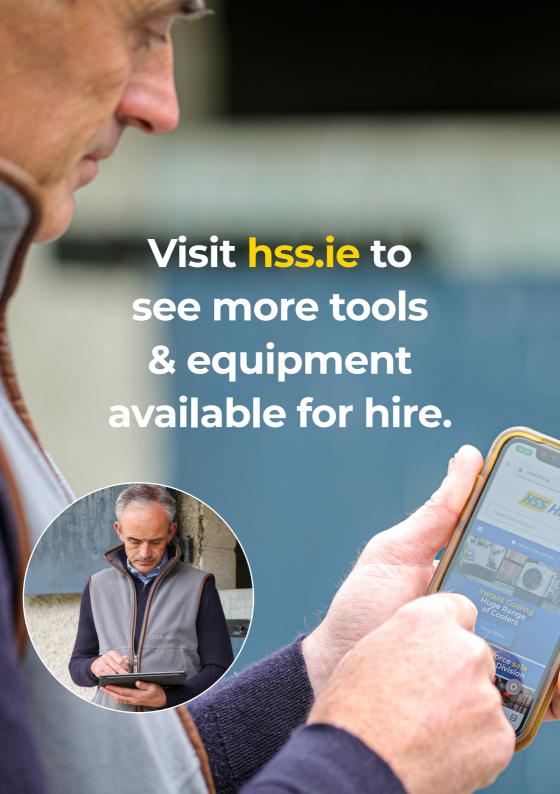

Drying & Pumping

Pump Dehumidifier (52 Ltr)

No more checking water levels and emptying water with this dryer. The in-built pump purges water automatically through the supplied hose direct into a sink or drain, over 12m away. The rotomolded polyethylene housing is dent resistant, offers superior durability, and helps to protect furnishings when in use. Stack up to two units high for storage. A rigid handle and semi-pneumatic wheels ensure easy transport and manoeuvrability.

- · Removes up to 55L of water per day
- · Supplied with a discharge hose

| Technical Specification | | | |
|---|---------------------------|--|--|
| Code | M5568 | | |
| Power | 240V/720W | | |
| Extraction Rate at AHAM Certified Conditions | 32L/day @ 26°C and 60% RH | | |
| Maximum Extraction Rate | 55L/day@32°C and 90% RH | | |
| Operating Range | 1° - 38°C | | |
| Weight | 36kg | | |



Useful for:

If your space is suffering from damp due to flooding, a leak, plastering or if it is an old building.



25Ltr Industrial Building Dryers

Dry out damp buildings quickly and efficiently before rot and fungus can take hold. Invaluable in the aftermath of floods & burst pipes, this dryer can also be used as a dehumidifier to reduce condensation after plastering or decorating.

- · Extracts 4.5 to 30L of water in 24 hours
- · Dries spaces up to 300m3

| Technical Specifications | | |
|--------------------------|--------------------------|--|
| Code | M5566 | |
| Power Rating | 1.5kw | |
| Voltage | 110V | |
| Weight | 55kg | |
| Extraction Rate | 25L at 20deg. and 75% RH | |





Puddle Pumps

This puddle pump is ideal for pumping out clear water from flooded areas and cellars. The electric pump will reduce water levels to within 1mm of the floor.

· Supplied with discharge hose

| Technical Specification | |
|-------------------------|-------------|
| Code | M5417 |
| Voltage | 110V |
| Power | 370W |
| Outlet Size | 25mm |
| Max Output (no lift) | 105L/minute |
| | |





Submersible Pump

For dealing with deep clear water found in drains, wells and swimming pools, these fully submersible electric pumps are both highly efficient and economical.

- · Can pump over 240L a minute
- · Supplied with discharge hose

| Technical Specification | | |
|-------------------------|-------------|-------------------|
| Code | M5418 | M5419 |
| Float Switch | No | Yes |
| Voltage | 110V | 110V |
| Power | 110V/480W | 480W |
| Outlet Size | 50mm | 50mm |
| Max Output (no lift) | 240L/minute | 240 Litres/minute |





Trash Pump

For clearing trenches and deep excavations of water and water-borne debris, this petrol-engine trash pump will handle solids up to 25mm and is capable of shifting over 1300 litres of water per minute.

| Technical Specifications | | |
|--------------------------|-----------------|--|
| Code | M5423 | |
| Outlet Size | 75mm | |
| Max Output (no lift) | 1340L/minute | |
| Max. Suction Lift | 8m | |
| Max. Total Head | 27m | |
| Fuel | Unleaded petrol | |











Centrifugal Pumps

Emptying swimming pools, pumping out flooded areas - these versatile lightweight portable pumps will cope with most water pumping jobs.

| Technical Specifications | | | |
|--------------------------|-----------------|-----------------|--|
| Code | M5421 | M5422 | |
| Outlet Size | 50mm | 75mm | |
| Max Output (no lift) | 600L/minute | 930L/minute | |
| Max. Suction Lift | 8m | 8m | |
| Max. Total Heat | 27m | 26m | |
| Fuel | Unleaded petrol | Unleaded petrol | |





4" & 6" Diesel Pumps

Seltorque solids handling pumps use vortex technology to deliver market leading solids handling for the most demanding sewage, sludge and bentonite applications.

- · Vortex style pump
- Environmentally friendly Selprime automatic self priming
- · Emission compliant engines
- · Ease of operation & maintenance
- · Proven design

| Technical Specifications | | |
|--------------------------|----------|----------|
| Model | S100 | S150 |
| Capacity | 165 m3/h | 320 m3/h |
| Total Head | 21.3m | 27m |
| Solids Size | 75mm | 100mm |
| Self Priming Lift | 8.8m | 8.8m |
| Air Handling | 24l/s | 24l/s |
| Power Required | 16kW | 40kW |
| Pump Speed | 1600rpm | 1600rpm |
| Inlet / Outlet | 100mm | 150mm |





Compact Dehumidifier With Pump

A compact, easy to manoeuvre and transport pump dehumidifier. No more checking water levels and emptying water containers with the inbuilt pumps purges waters through the supplied hose direct into a sink or drain up to 7m away.

Can be used for removing moisture in the air following flood and rain damage. It can also be used for drying plaster allowing decorating rooms to start sooner. The compact design makes it beneficial in domestic and commercial environments

Whilst a dehumidifier on its own can be very effective it is worth considering using a heater and an air mover at the same time to speed up the process.

- · Compact easy to operate unit.
- · Removes up to 16 Litres per day.
- Ideal solution for removing moisture in domestic and commercial environments.
- · Supplied with discharge hose.

| Technical Specifications | |
|-----------------------------|-------------------------|
| Code | M6808 |
| Max Exraction Rate | 16L/day @ 30°C & 80% RH |
| Operating Temperature Range | 5 - 32°C |
| Voltage | 240V |
| Watts | 395W |
| Weight | 21kg |
| Dimensions L x W x H | 360mm x 330mm x 490mm |







Plumbing

Central Heating Flusher

A professional descaling unit designed to flush out central heating systems and remove harmful iron oxide deposits, which can cause radiator cold spots and blockages. Also protects boilers and pumps. Gloves and cleaning fluid can be purchased online or when flusher is picked up.

- · 50 Litre heavy duty tank
- · Easy to use cam-lock connections
- Reverse flow and double dump facility as standard

| Broflush Providence |
|---------------------|

Technical Specification

Code M5499 Voltage 240V Power Rating 370W

Capacity / Total Head 40L/12m @ 60L/minute

Weight 12kg



Pipe Freezing Kit

Note: Please state pipe size when ordering.

No need to drain plumbing systems to make repairs or alterations. Provided the cold water is not flowing, sections can be isolated with ice plugs.

| Technical Specificat | ion | | |
|----------------------|---------|---------|--|
| Code | M6910 | M5755 | |
| Voltage | 110V | 240V | |
| Power | 310W | 310W | |
| Pipe Sizes | 12-42mm | 12-42mm | |
| Weight | 25ka | 25ka | |





Pressure Tester

Test for leaks in pipework and water systems following installation using our manual or electric pressure pumps.

- Manual tester
- · Sensitive pressure-loss leak detection
- · Electric tester



| Technical Specifications | | |
|--------------------------|-----------------|---------------------|
| Code | M5757 | M5758 |
| Item | Manual | Electric |
| Max Test Pressure | 60 bar (840psi) | 40-78 bar (1100psi) |
| Weight | 7kg | 16kg |



Rothenberger Pipe Threader 3in

This powerful and professional Rothenberger Pipe Threader 3in is what you need for threading, cutting and reaming steel pipe in bulk either on site or in a workshop. The foot switch control allows for hands free operation, whilst the self-oiling lubrication system ensures best performance and precision threading.

- · Safe foot-switch control for hands-free operation
- · Self-oiling lubrication system
- · S3 threader
- · Supplied complete with sturdy stand

| Technical Specification | | |
|-------------------------|-------|--|
| Code | M5743 | |
| Voltage | 110V | |
| Power Rating | 1700W | |
| Piston Force | 100kN | |
| Weight | 100kg | |
| | | |





Cleaning

Carpet Cleaner

Our carpet cleaner is ideal for domestic carpets in households and small offices. This compact and easy to manoeuvre unit is simple to operate and cleans / restores pile on most fabrics (test small area first).

- · Quick drying and leaves minimal residual moisture
- · Deep cleans carpets
- · Simple to operate
- · Carpet cleaning solutions for sale

| Technical Specification | |
|--------------------------|--------------------|
| Code | M6306 |
| Voltage | 240V |
| Power | 1100W |
| Maximum Area Performance | 20/25m²/h |
| Air Flow Rate | 54L/s |
| Spray Rate | 1L/m |
| Spray Pressure | 1bar |
| Back Pressure | 2.5bar |
| Tank Capacity | 10L |
| Dimensions (L x W x H) | 665 x 320 x 435mmm |
| Weight | 10kg |





Compact Pressure Washer

This highly mobile petrol-powered highpressure cleaner is mounted in a tubular steel cage frame. The machine is ideal for cleaning applications where no power supply is available.

| Technical Specification | on |
|-------------------------|---|
| Code | M5668 |
| Engine/Fuel | Recoil start 4-Stroke/ Unleaded petrol |
| Operating Pressure | 150bar (2200psi) |
| Flow Rate | 650L/h |















Pressure Washer

With an operating pressure of up to 130 bar, our compact and versatile power washer is ideal for a wide range of cleaning jobs.

- · Automatic pressure cut-off for reduced energy and water consumption. Switches off immediately when work is interrupted
- · Integrated 10m high-pressure hose



Useful for:

Cleaning patios & furniture Avenue's / footpaths **Exterior Walls of buildings** Concrete garage floor Wooden Deck Garden walls Car, bin, gutters











Technical Specification

Code M5663 Voltage 240V Power 2200W 130bar Maximum Pressure Operating Pressure 115bar 500L/h Flow Rate

360 x 375 x 925mm Dimensions (LxWxH)

Weight 19kg Spray Output 8.3L/minute

Wet & Dry Vacuum

This wet & dry vacuum can stand up to constant use in difficult wet or dry applications. With a drain hose for easy emptying and a generous 90L capacity, the wet and dry vacuum makes dealing with large-scale floods or spillages easy.

M5651

110V 2200W

| Technical Specification | |
|-------------------------|--|
| Code | |
| Voltage | |

Power

Waste Capacity 30L (6.59 gallons)



Compact Pressure Washer & Bowser

This powerful compact pressure washer and bowser is designed for hard to reach areas and provides approx. 12 minutes constant washing time away from a water source.

Technical Specification

Code M5683 Pressure (at full flow) 1500psi Water Flow (at full pressure) 91/min Tank Capacity 150L Fuel Petrol













| Description | Make | Model |
|---------------------------|---------|-----------------|
| Scrubber Dryer Pedestrian | Karcher | BR35/12 |
| Scrubber Dryer Pedestrian | Karcher | BR45/22 |
| Scrubber Dryer Pedestrian | Karcher | B40 |
| Scrubber Dryer Pedestrian | Karcher | B60 |
| | | |
| Scrubber Dryer Ride On | Karcher | B90 |
| Scrubber Dryer Ride On | Karcher | B110 |
| Scrubber Dryer Ride On | Karcher | B150 |
| Scrubber Dryer Ride On | Karcher | B200 |
| Scrubber Dryer Ride On | Karcher | B260 |
| Scrubber Dryer Ride On | Karcher | B300 LPG/Diesel |
| | | |
| Sweeper Pedestrian | Karcher | KM75/40 |
| | | |
| Sweeper Ride On | Karcher | KM100/100 |
| Sweeper Ride On | Karcher | KM105/110 |
| Sweeper Ride On | Karcher | KM100/120 |
| Sweeper Ride On | Karcher | B300 LPG/Diesel |
| | | |
| Municipal Compact Sweeper | Karcher | MIC35/42 |
| Municipal Compact Sweeper | Karcher | MC130 |









Gardening

Portable Electric Shredder

Reliable, strong and powerful machine that reduces garden waste, including branches, brushwood and prunings, into compost material and mulch. Easy to transport.

- · Removal bag for easy waste disposal
- · Low noise it has double wall to reduce noise pollution

| Removeable funnel for ease of transportation | | |
|--|---------------------|--|
| Technical Specifications | | |
| Code | M5720 | |
| Voltage | 240v | |
| Weight | 63kg | |
| Cutting Capacity | 35mm | |
| Dimensions (L x W x H) | 1280 x 650 x 1385mm | |





Turf Cutter

Chopping Speed Cuts/min 36

The easiest and most efficient way to remove large areas of turf in preparation for landscape gardening projects, pipe and cable laying.

· Ideal for removing turf that needs to be relaid

| Technical Specification | |
|-------------------------|--------------|
| Code | M5706 |
| Fuel | Petrol |
| Working Width | 400mm |
| Blade Depth Adjustment | 25mm to 40mm |
| Weight | 90kg |













Rotavator - Power Digger



Digging over large areas of cultivated ground? You'll find it quicker and less backbreaking with this powerful professional rotavator.

Ideal for commercial and domestic applications, this tool is easily capable of producing excellent results on previously cultivated ground such as garden borders, allotments and vegetable plots.

- · Powerful 5hp engine with a digging depth of 200mm
- · Working width of 640mm making this item ideal for use on large areas

Note: petrol is NOT supplied with this item (fuel container available to purchase)



| Technical Specification | |
|-------------------------|---------------------------|
| Code | M5712 |
| Engine | 5hp Recoil start 4-Stroke |
| Fuel | we do not supply fuel |
| Fuel Tank Capacity | 3.1L |
| Fuel Consumption | 1.4L per hour |
| Working Width | 640mm |
| Digging Depth | 200mm |
| Weight | 69kg |
| Dimensions (LxWxH) | 1400 x 700 x 840mm |

Rotary Lawn Mower

Mowing large areas is no problem for this professional, powerful rotary petrol lawn mower.

Technical Specification

Code M5702

Recoil start 4-Stroke Engine Unleaded Petrol

Fuel (fuel is not supplied with this item)

Cutting Width Weight 29ka













Lawn Scarifier

Our powerful petrol-driven lawn scarifiers are ideal for use on large lawns, parkland and playing fields.

Technical Specification

Code

4.8hp Recoil Start Engine Fuel Unleaded Petrol

Fuel Tank Capacity 3.1L Working Wldth 420mm Weight 63kg















Why not give your lawn that professional finish with this easy to handle, easy to clean garden roller. This Roller is ideal for the compressing of soil work and smoothing of lawns and is lightweight when empty to carry in a car.

- · Use for the smoothing of lawns

Ideal for compressing soil

· Can be filled with water or sand

Technical Specification

| Code | M5705 |
|----------------|-------------|
| Weight (empty) | 7kg (empty) |
| Weight (full) | 63kg (full) |





Mini-Dumper

This 0.25 tonne dumper is an exceptional machine for moving building materials and aggregate. This 4-wheel drive power unit is 700mm wide, making it narrow enough to fit through the average doorway for internal work, slip down side alleys or climb over steps and footings.

| Technical Specification | |
|-------------------------|---|
| Code | M5402 |
| Engine | 5.5hp |
| Fuel | Unleaded Petrol (fuel is not supplied with this item) |
| Capacity | 6 cu ft or 1/4 tonne (250kg) carrying capacity |
| Weight | 110kg |









Hedge Trimmer

Petrol hedge trimmers and cutters are perfect for larger gardens and are ideal for working away from mains power supply.

· Please note - Fuel is not supplied with the petrol model of this item













Technical Specification

Code M5709 Voltage

Recoil start 2-Stroke

Petrol (not included with hire) Power

Blade Length 700mm

Long-Handled Hedge Trimmer

This long-handled petrol hedge trimmer lets you cut tall hedges anywhere in the garden, without the need for access equipment.

· Adjustable cutter bar for greater visibility and less tiring work



Code M6300

Fuel Petrol + 2-Stroke Mix

Cutter Length 550mm Pole Length 2.34m













Leaf Blower

This portable petrol driven backpack leaf blower is ideal for clearing areas of fallen leaves, grass cuttings and other materials. It can clear large areas both quickly and conveniently.



Technical Specification

M6305 Code

Engine 2-Stroke Air-Cooled Fuel Petrol + 2-Stroke Mix

9kg Weight











Petrol Strimmer Brush Cutter

Made to cut long grass, lawns, weeds and light under-growth, this petrol strimmer brush cutter will reach into the most inaccessible places.

- · Choice of heads for grass and undergrowth
- · Star blades / cord / decimator are not included and are sold separately



Technical Specification

Code M5700

Engine 1.5hp Recoil start 4-Stroke

Fuel Unleaded Petrol

Weight 6.5kg















Flame Gun

Whether you're burning off weeds or sterilising ground ready for digging, this triple-burner flame gun will get the job done. Propane gas available for sale.



Code M5714 Gas Consumption 5.9kg/hour Weight 3ka









Buying New Kit?



We are a one stop shop for all your equipment hire and sale requirements.

As you know, hiring kit is our speciality. We do it day in, day out. But, we're also a large seller of tools, equipment and accessories. We're confident that whatever you need, we can provide it.

Popular Sales Items



















Teleporters

Powered Access

Lighting Towers

Fencing & Barriers

Generators

Forklifts
Gators
Bowsers
Heaters / Coolers
Saws

Pumps
Dehumidifiers
Breakers & Drills
Dumpers
Excavators

Safety Symbols

Make sure you meet your duty of care for employee and personal safety. To help you, we ensure all HSS products conform to the Health & Safety at Work Act 1974.



Eye Protection – All round protection grade 1 goggles to EN 166.B – Less hazardous work: grade 2 spectacles.



Breathing Masks

 General purpose, disposable masks or low-risk dust and water-based airborne sprays.



 Respiratory disposable masks with charcoal filter for welding fumes, ozone and most nuisance level odours.



3. Consult product supplier for guidance and COSHH data information.



Welding Masks – Welding masks or goggles are included with your equipment.



Ear Defenders – Protection against high noise levels. Earplugs are suitable for short-term work.



Safety Footwear – To BS EN 345 for toe protection.





Vibration Caution

More information can be found at hss.com



Protective Gloves – Gauntlets, PVC, cotton or rigger gloves for hand protection.



Safety Helmets – Protect against falling objects. Compulsory on site.



Dust – We recommend using a Dust Extractor where you see this symbol.



Disposable Overall – Semi-durable polypropylene material protects clothing from accidental splashing and dirt.



Power Breaker – RCD Residual Current Devices protect from electric shock. Strongly recommended for electrical equipment used outdoors or in damp conditions.



Personnel Lifting – Equipment designed for personnel lifting. Use of safety restraint harness recommended.



Vertical Lifting – Use only for vertical lifts.

Position or suspend equipment from a safe point to take weight of load and equipment.



Angle Lifting – Use at any angle for lifting, pulling or dragging. Anchor to a secure point able to take load force applied. Allow for contact friction if dragging.



Sling Lifting – Do not use "load" cable/chain as sling. Prevent hook overcrowding, with a "bow" shackle. Join lifting equipment with a 'D' shackle. Protect sharp edges to prevent load damage.



Stable Load – Ensure load is balanced and personnel stand clear. Attach "tag" lines to control rotation. Never leave equipment unattended. Ensure unobstructed landing site accepts equipment plus load in size and weight.



Hook Safety – Ensure safety catches are engaged and load chains/cables are untangled and hang freely.

Transport Symbols

Collecting Yourself

If you are collecting equipment, weights are shown in kilograms and are supported by symbols indicating the type of vehicle needed.

Where no symbol is shown the equipment may be carried in a family saloon.



Estate car



Truck



Towable 7.5 tonne truck



Fuel Services

We can supply Eco packs, Red Diesel and Fuel Management Services where you see this symbol.

H.O.L (Height of Lift) S.W.L (Safe Working Load) Indicates the maximum height of lift.

Do not exceed safe working load or submit to a load greater than its carrying capacity.

Working height (2 metres above platform).

Branch Directory

Cork

Fortwilliam, Tivoli, Co. Cork, T23 W6EF cork5941@hss.com / 021 431 3000

Dublin - Greenogue

501-4 Greenogue Business Park, Rathcoole, Co. Dublin, D24 ET32 dublin5007@hss.com / 01 257 2242

Dublin - Docklands

C, Castleforbes Rd, North Dock, Dublin 1, D01 X9H7 dublindocklands5867@hss.com / 01 865 4910

Dublin - Santry

Q3 North Ring Business Park, Santry, Dublin 9, D09 E6F2 dublin325@hss.com / 01 842 7773

Dublin - Longmile Road

Avonbeg Industrial Estate, Long Mile Rd, Walkinstown, Dublin 12, D12 X564 Dublin830@hss.com / 01 456 7707

Portarlington

Unit 12 Botley Ln, Kilmalogue, Portarlington, Co. Offaly, R32 X01X dcostello@hss.ie/ 057 869 9893

Galway

Unit 1, Tuam Road Retail Centre, Tuam Road, Galway, H91 V4K5 galway832@hss.com / 091 773 062

Limerick

Ballysimon Road, Limerick, V94 E544 limerick5988@hss.com / 061 409 509

Waterford

Six Cross Roads business park, Waterford, X91 XR22 waterford8386@hss.com / 051 349 391