


Large Volume Airless Spray (Twin Gun)

61443

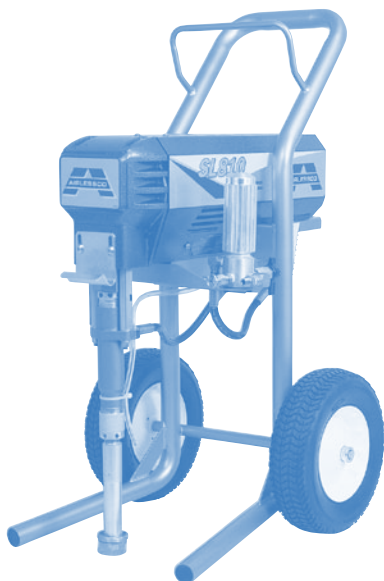

REMINDER

Machines returned dirty will be subject to a cleaning charge of £30.00.

PRODUCT DETAILS

- Supplied with – Gun, Tip, Filter Set (to suit), flushing device and 15m Paint Line.
- Principally designed for external use on large residential, commercial buildings and industrial use.
- Capable of spraying many materials including: Emulsion, Enamels & Gloss Topcoats, Decking & Fence Coatings and Concrete Sealers.
- Popular machines in this class are the Graco Ultra Max 795, Titan 740i and Titan 840i.
- This machine can run 2 guns simultaneously. To max Tip Size of 0.019" per gun
- If a tip size of 0.025 inches or greater is being used then the filter should be removed.

SPECIFICATIONS

• Max Tip Size	1 Gun 0.029 inches (0.737mm) / 2 Guns 0.019 inches (0.483mm)
• Pump Volume	0.66 GPM or 3.0 litres/min
• Free Flow	0.75 GPM or 3.4 litres/min
• Weight	61kg
• Power Supply	110v / Up to 16 Amps

OTHER INFORMATION

- Cleaning Equipment required:- two 5 gallon paint buckets, clean water, cleaning rags and flushing device.
- A cleaning charge may apply if customers are using solvent based paint as they require special cleaning.
- If no SL810's are available the Airlessco SL1100 is an excellent alternative.

HIRE TIPS

- Position Spray away from the area being painted to avoid over spray, which will reduce the cleaning the machine will require.
- Incorrect Tip Size will lead to over and under delivery of materials. See Tip Size / Filter Chart for details.
- Worn tips and Filters need to be changed regularly to maintain an even spray.

ADDITIONAL ITEMS

- Spray Gun (including 15m Paint Line) – 61543 & 61559.
- Additional 15m Paint Lines – 61559.
- Filter/Mesh & Tips (available for sale).
- Corrosion Check (to be supplied sale or return on extended hires over 1 day).
- Safety Equipment required:- mask, goggles, gloves & overalls. Customer should refer to relevant COSHH details for correct PPE.
- Generator Requirement – 4kva.

CLEANING

- Clean Spray Gun, Hose & Pump. Immediately after use.
- Flush out all remaining paint from the Internal Components of the machine. (See guide for full Cleaning Procedure).

YOUR LOCAL BRANCH



08457 28 28 28

www.hss.com